

LOIRE®

LOIRE HARDWARE CO., LIMITED
E-mail: loire@loire-hardware.com
[Http://www.loire-hardware.com](http://www.loire-hardware.com)

LOIRE®

LOIRE®

Frameless Shower Door Hardware & Accessories

**CATALOG
2019SD**

FRAMELESS SHOWER DOOR HARDWARE & ACCESSORIES

CATALOG
2019SD





COMPANY PROFILE

Loire Hardware Co., Limited was founded in 2000, located in Guangdong China. We are focus on developing and manufacturing shower hardware, glass door fittings and other glass accessories related. All products are made of Various high-quality material, such as Forged brass, stainless steel, aluminium alloy and zinc alloy with different perfect surface to meet the requirement of various market. Our products are sold worldwid for more than 10 years, 90% of products marked.

Our own brand LOIRE and other OEM brand are mainly exported to Europe & North America market. Today the full set of shower room comes with Loire' s own hardware, all accessories preset in the room passed kinds of critical testing thanks to Loire's experience on hardware.

The pursuit of "Excellent quality & Resonable price" is a religion to Loire forever.
Loire, still Keep Moving towards The Better.

Equipment&processing



LOIRE

SHOWER DOOR HARDWARE PRODUCTS

Shower Hinges
Shower Bars, Shower Supports & Accessories
Door Knobs & Shower Handles
Sealing Strips
Aluminium Profiles
Floor Drain
Door Hardware


MATERIAL









Stainless Steel Brass Aluminium Zinc Alloy




CONTENTS

	Brass shower Door Hinges (Spring Function)	01-42
	Stainless Steel Shower Hinges (Spring Function)	43-46
	Brass Shower Hinges (Adjustable)	47-66
	Top Or Bottom Shower Hinges	67-74
	Brass Shower Hinges (No Spring)	75-80
	Stainless Steel Glass Connectors	81-84
	Brass Glass Connectors	85-114
	Sliding Door Series	115-128
	Shower Supports	129-131
	Shower Glass Clamps	132-138
	Shower Door Knobs	139-140
	Shower Handles	141-150
	PVC Seals	151-152
	Bathroom Accessories	153-160

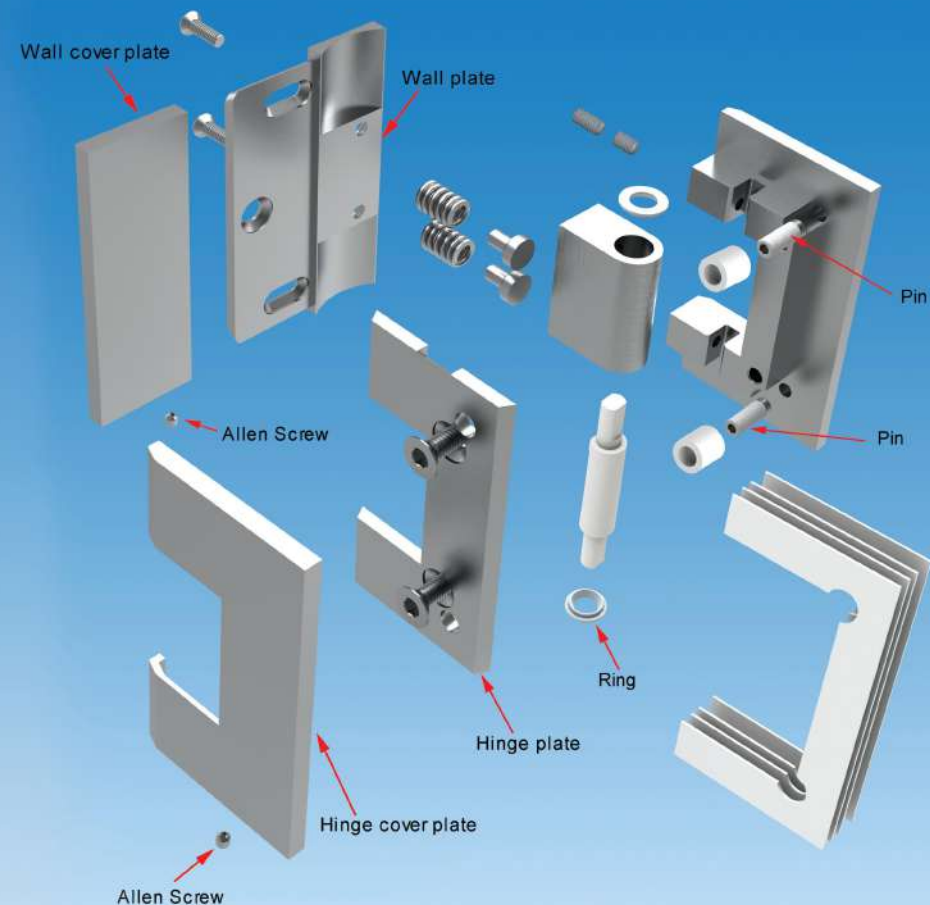


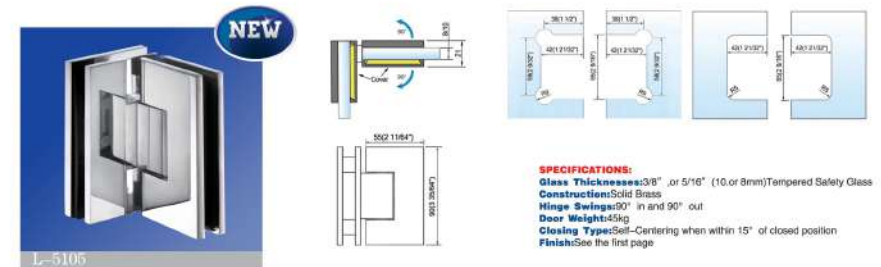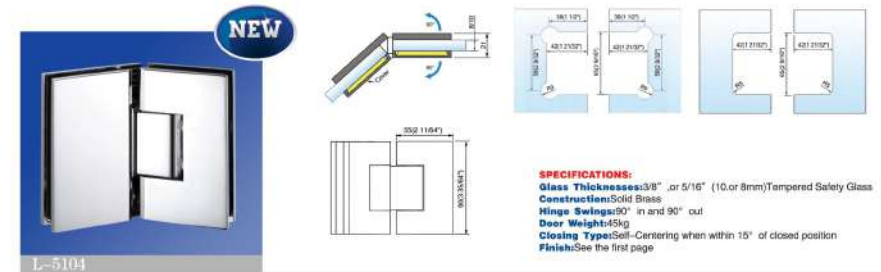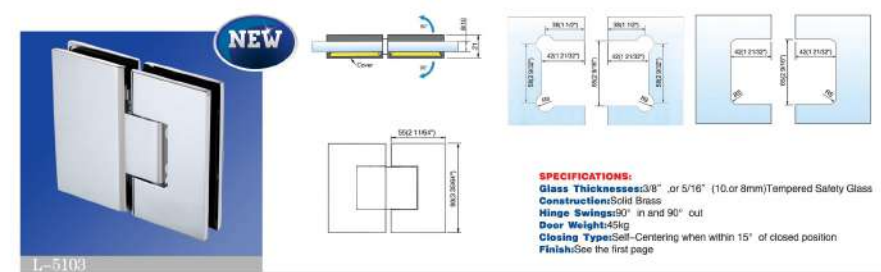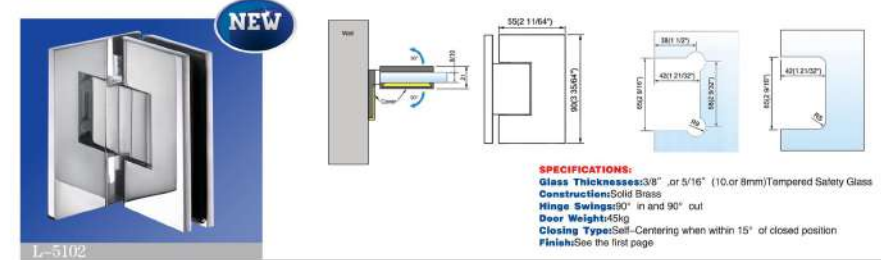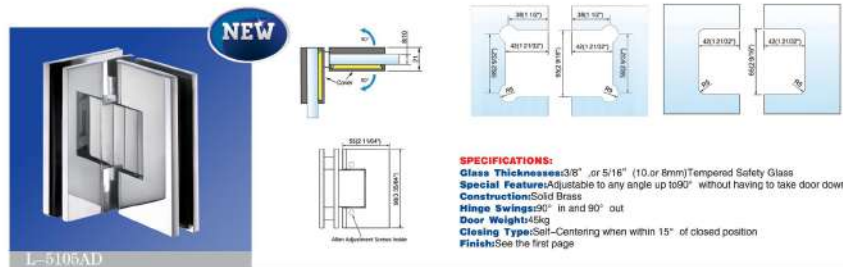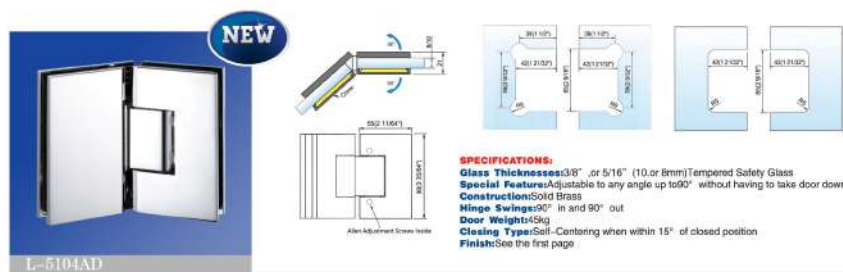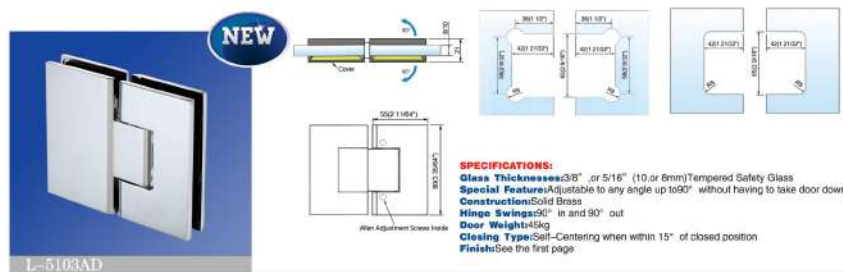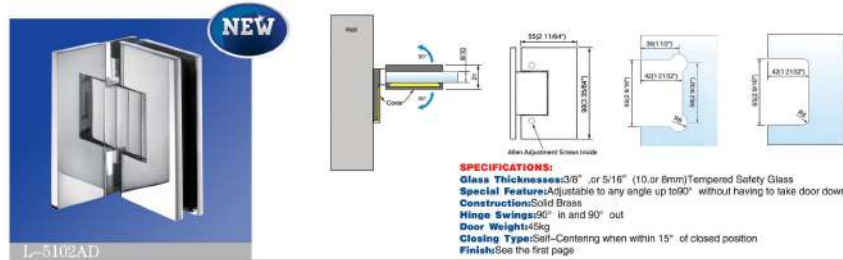

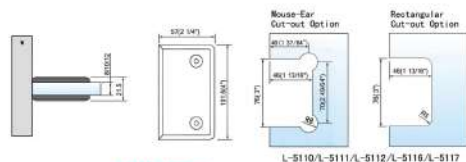


L-5110/L-5111/L-5112/L-5116/L-5117


SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

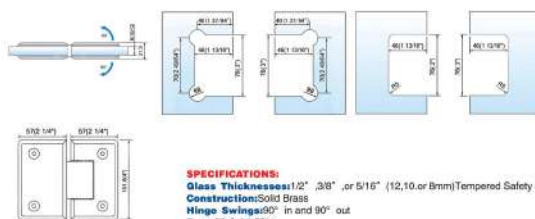


SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-5114


SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

Heavy Duty Shower Hinges




Heavy Duty Shower Hinges




LOIRE


Adjustable Heavy Duty Shower Hinges



SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

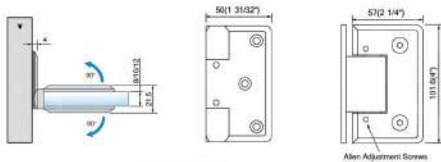

SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

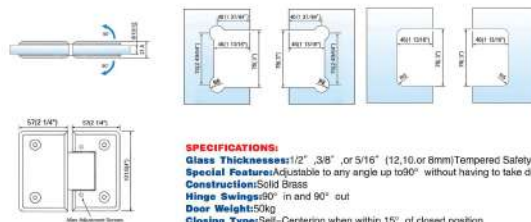


SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

LOIRE


Adjustable Heavy Duty Shower Hinges

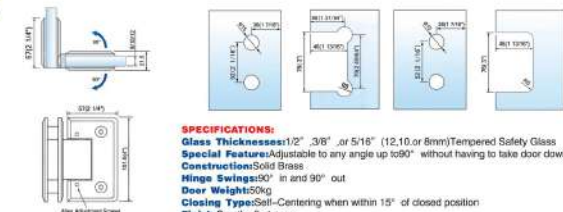

SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




SPECIFICATIONS:
Glass Thicknesses: 1/2", 3/8", or 5/16" (12, 10, or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

LOIRE

Adjustable Heavy Duty Shower Hinges

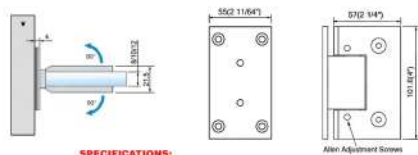

SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

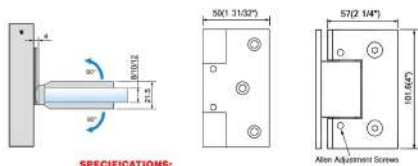

SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page

LOIRE


Adjustable Heavy Duty Shower Hinges

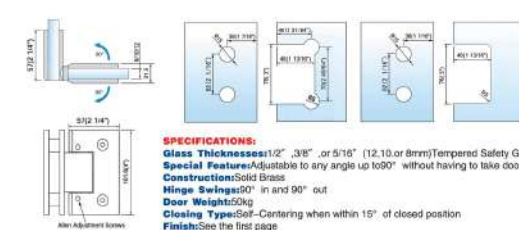

SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page







SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



SPECIFICATIONS:
Glass Thicknesses: 1/2" , 3/8" , or 5/16" (12,10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 50kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page





LOIRE

Heavy Duty Shower Hinges With Cover

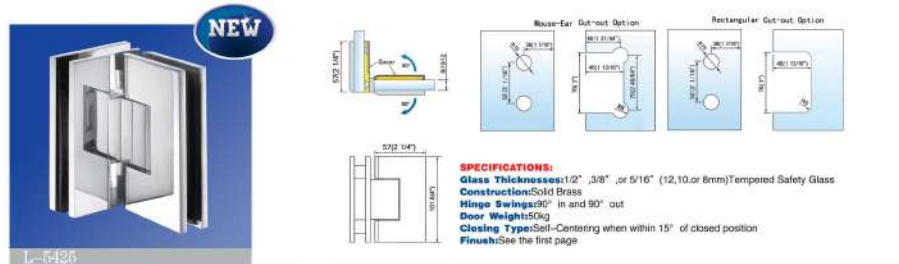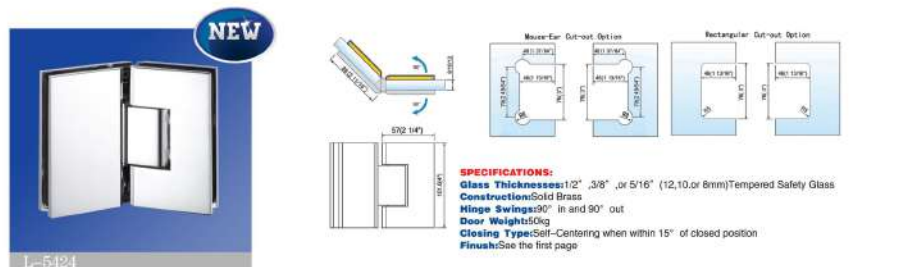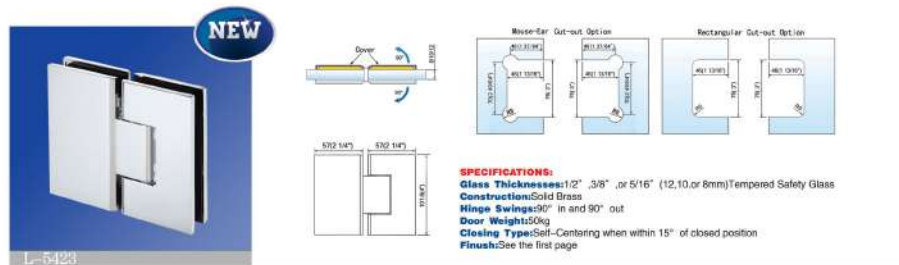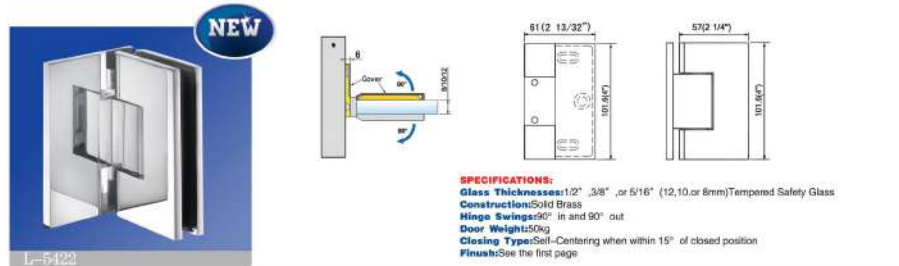

LOIRE

Adjustable Heavy Duty Shower Hinges With Cover

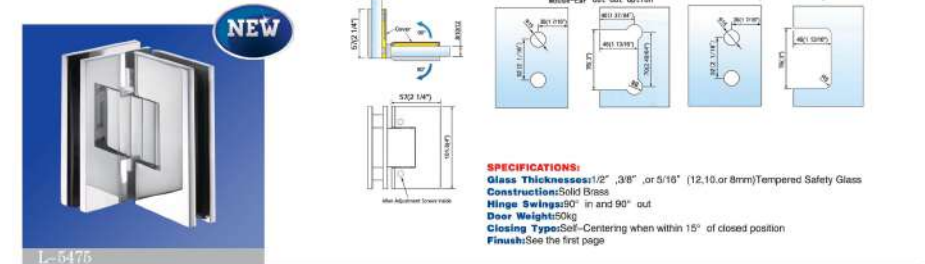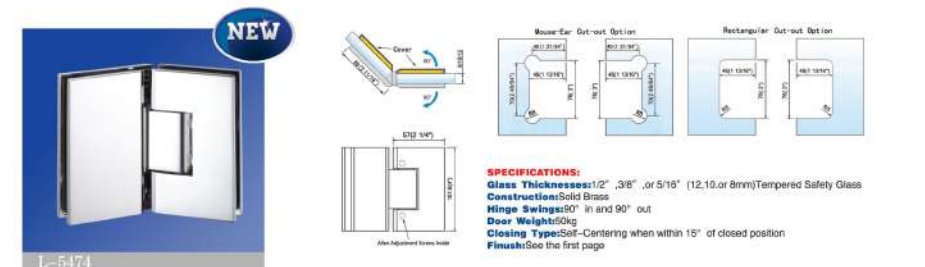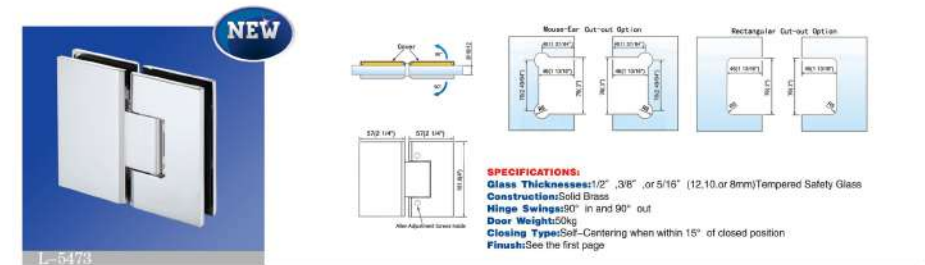
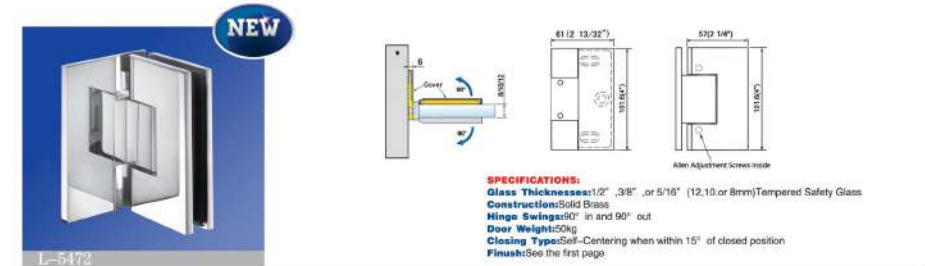




NEW



L-2401

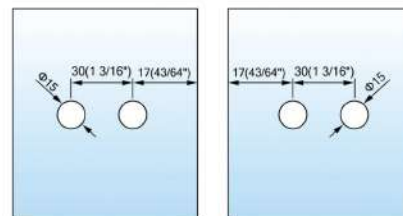

SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)


Closing Type: Free Swinging

Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page



NEW

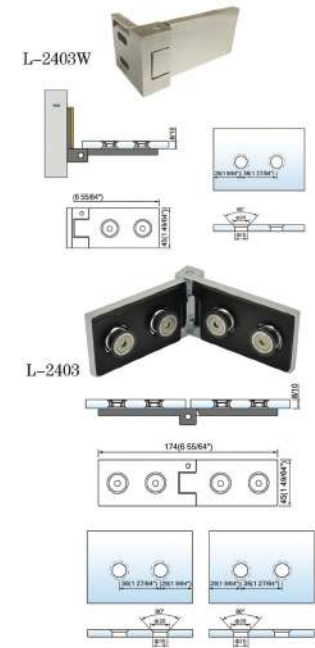


L-2403W


L-2403



L-2692



L-2695

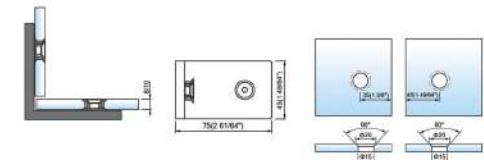


LOIRE

Lifting And Lowering Hinges



NEW

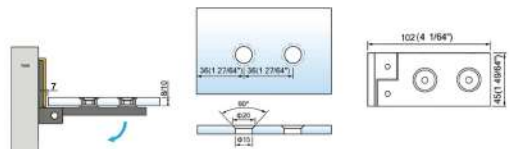

SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function


Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page

L-2402WL



NEW

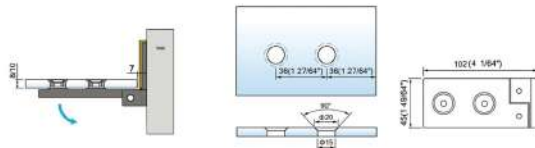

SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function


Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page

L-2402WR



NEW

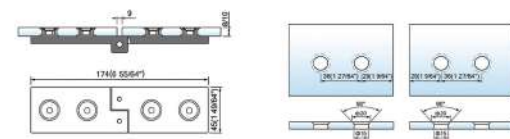

SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function


Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page

L-2402R



NEW



SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function

Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page


L-2402L

LOIRE

Lifting And Lowering Hinges



NEW

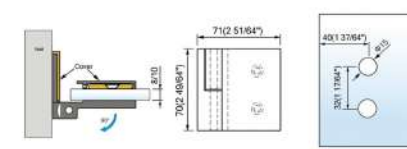

SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function


Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page

L-5203L



NEW



SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function


Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page

L-5203R



NEW

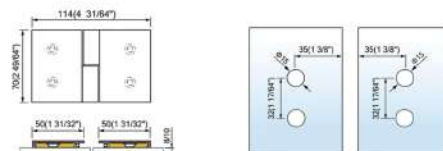

SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function


Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page

L-5204L



NEW



SPECIFICATIONS:

Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Closing Type: Lifting and Lowering Function

Hinge Swing: One-Sided Opening Outwards 90°


Finish: See The First Page

L-5204R



L-5201

Wall to Glass

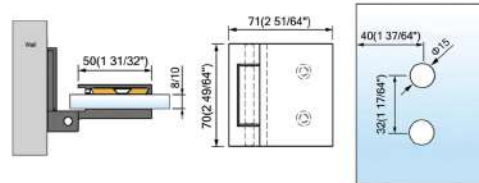
SPECIFICATIONS:
Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)


Closing Type: Free Swinging

Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page


L-5302

Wall to Glass

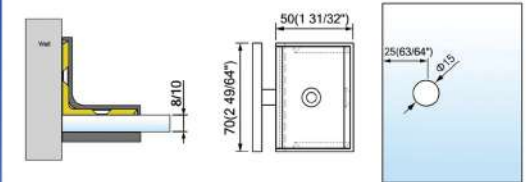
SPECIFICATIONS:
Material: Solid Brass


Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)

Includes: Cover, Mounting Screws and Gaskets

Finish: See The First Page


L-5202

Glass to Glass

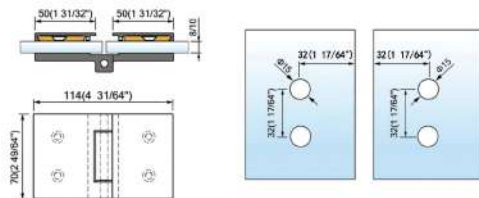
SPECIFICATIONS:
Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)


Closing Type: Free Swinging

Hinge Swing: One-Sided Opening Outwards 90°

Finish: See The First Page


L-5305

Glass to Glass


SPECIFICATIONS:
Material: Solid Brass

Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)


Includes: Cover, Mounting Screws and Gaskets

Finish: See The First Page



L-2100


Wall Mount

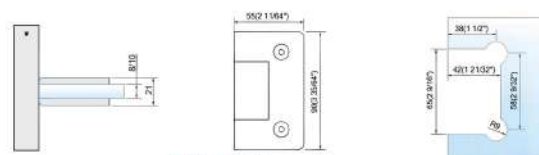

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page




L-2101

Wall Mount
Full Back Plate

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2102


Wall Mount
Offset Back Plate

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2103

180° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2104

135° Glass-to-Glass

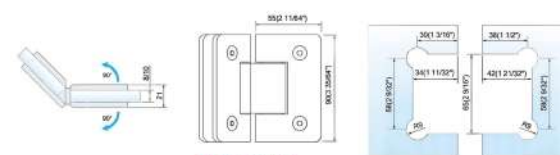


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2105


90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2106

Wall Mount
Full Back Plate

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page











L-2108

T Hinge Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm)Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page

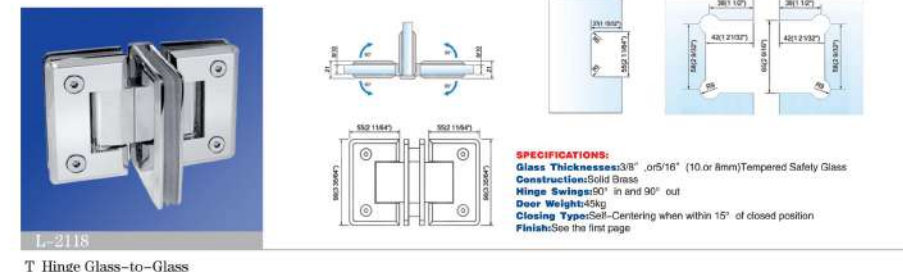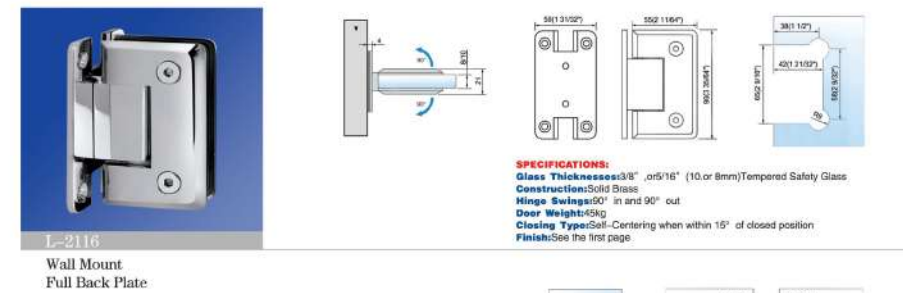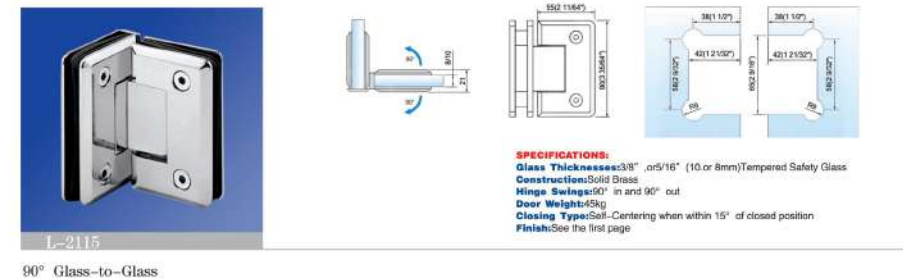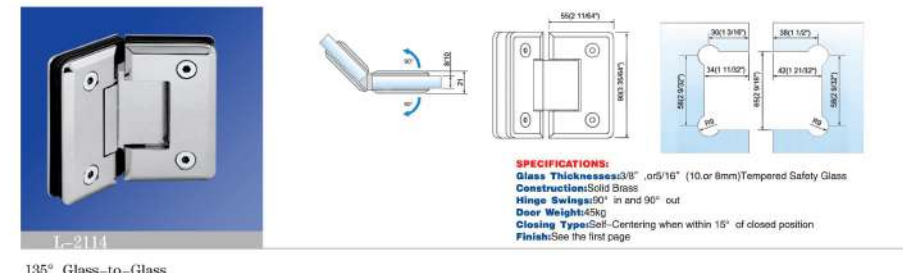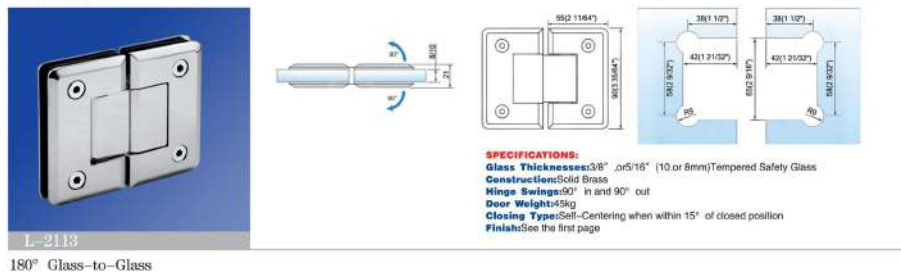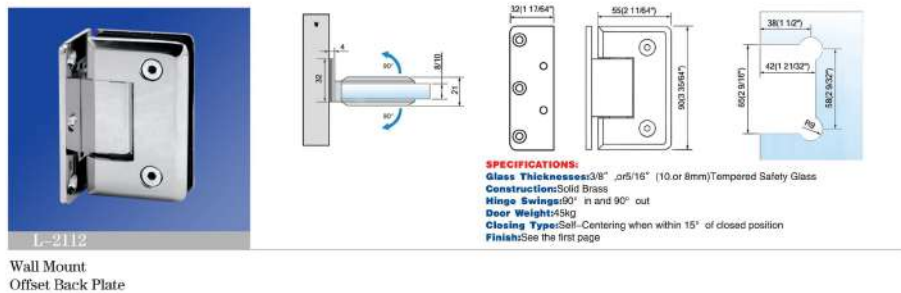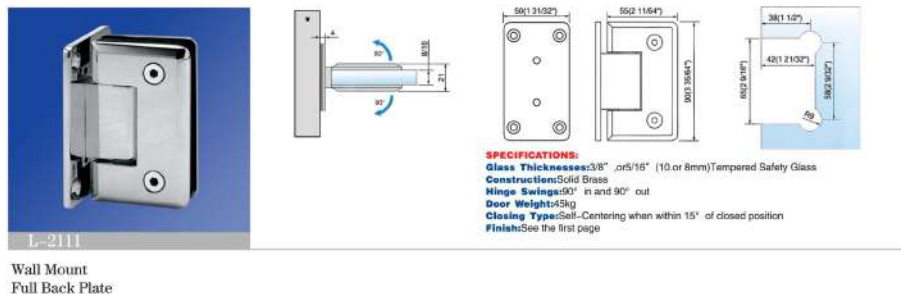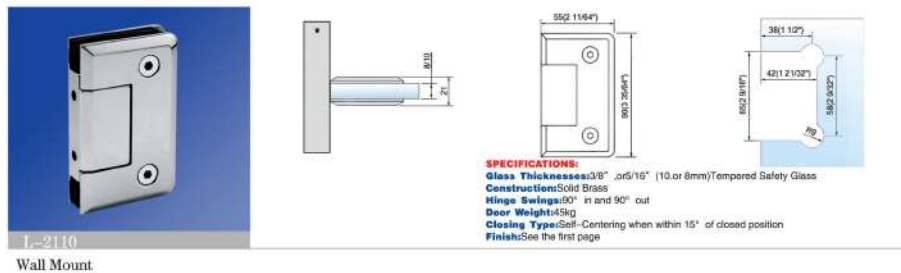



L-2111W

Wall Mount
Full Back Plate




SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2112W

Wall Mount
Offset Back Plate

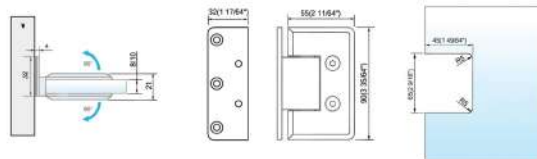


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2113W

180° Glass-to-Glass

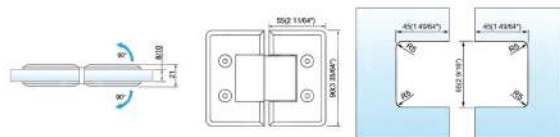


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2114W

135° Glass-to-Glass

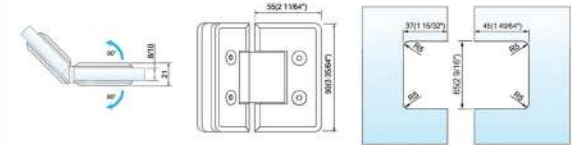


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2115W

90° Glass-to-Glass

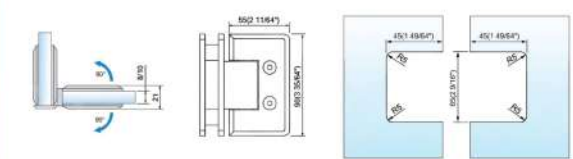


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2116W

Wall Mount
Full Back Plate

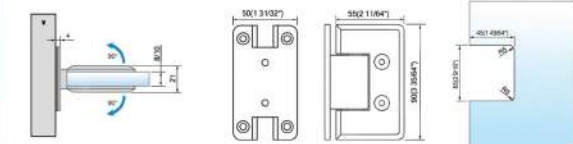


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2120


Wall Mount

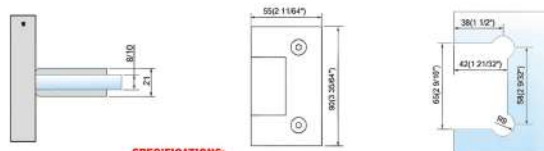

SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2121

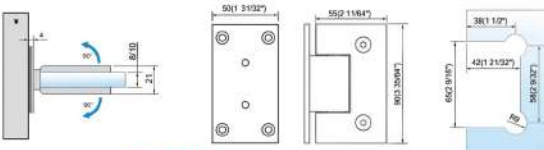Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2122

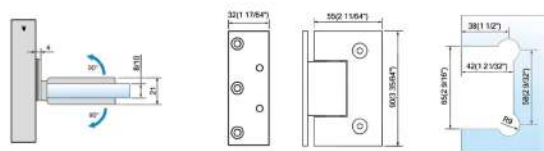
Wall Mount
Offset Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2123

180° Glass-to-Glass

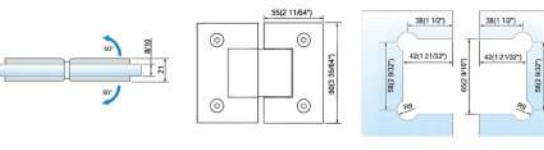


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2124

135° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2125


90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2126

Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2127

Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2128


T Hinge Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2121W
Wall Mount
Full Back Plate

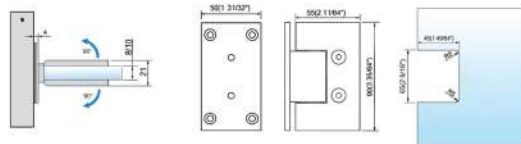

SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2122W
Wall Mount
Offset Back Plate

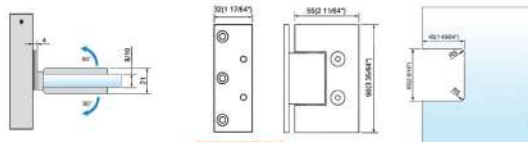

SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2123W
180° Glass-to-Glass

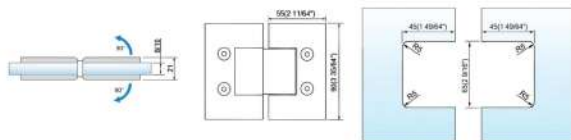

SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2124W
135° Glass-to-Glass

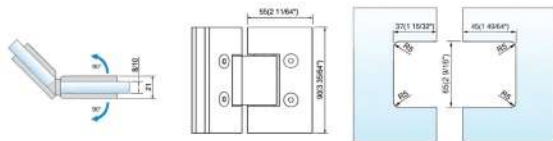

SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2125W
90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2126W
Wall Mount
Full Back Plate

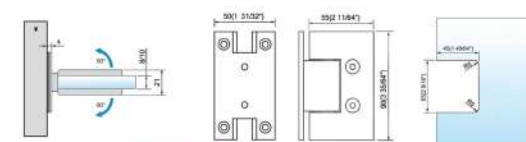

SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2127W
Wall Mount
Full Back Plate

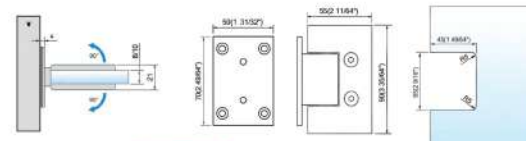


SPECIFICATIONS:
Glass Thicknesses: 3/8", or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2130


Wall Mount

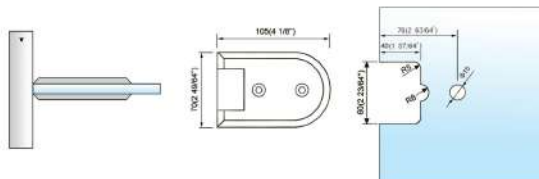

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page




L-2131

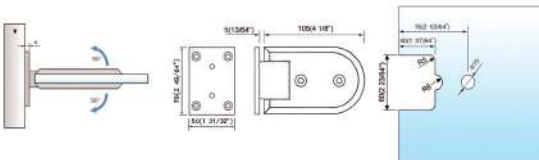Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2132

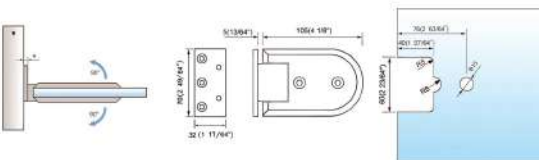
Wall Mount
Offset Back Plate


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2133

180° Glass-to-Glass

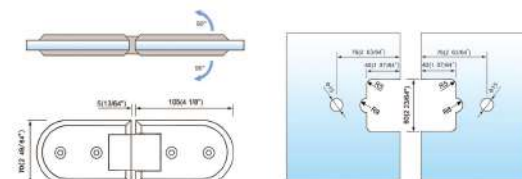


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2134

135° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses:3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2135


90° Glass-to-Glass

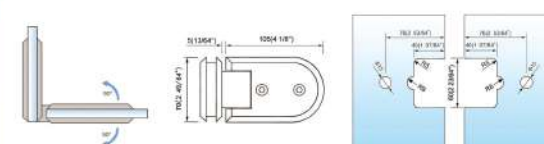

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction:Solid Brass
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page




L-2140
Wall Mount

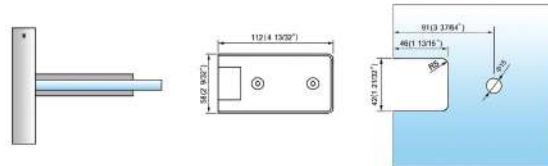

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2141
Wall Mount
Full Back Plate

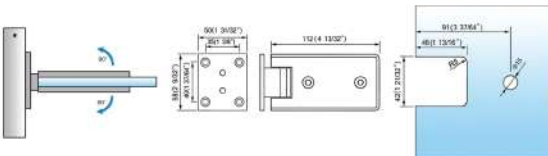

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2142
Wall Mount
Offset Back Plate

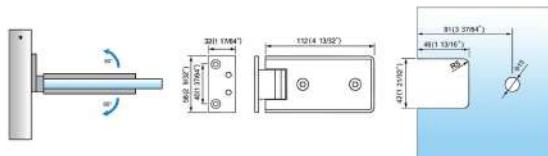

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2143
180° Glass-to-Glass

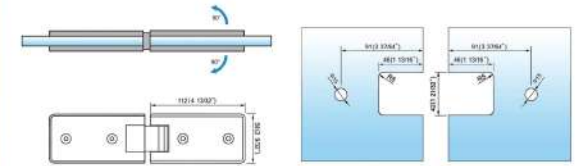

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2144
135° Glass-to-Glass

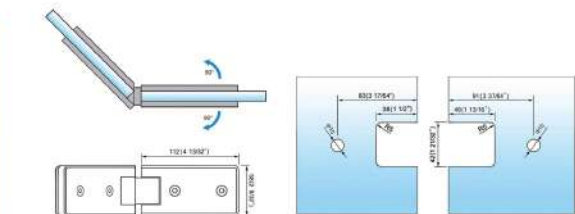

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2145
90° Glass-to-Glass

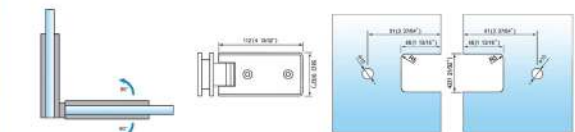


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2150


Wall Mount

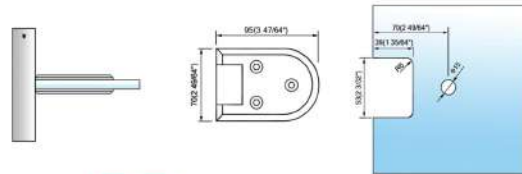

SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weights: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2151

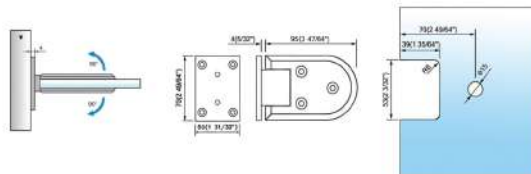Wall Mount
Full Back Plate

SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weights: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2152

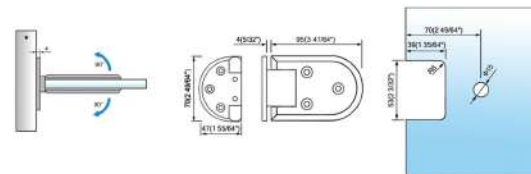
Wall Mount
Offset Back Plate

SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weights: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2153

180° Glass-to-Glass

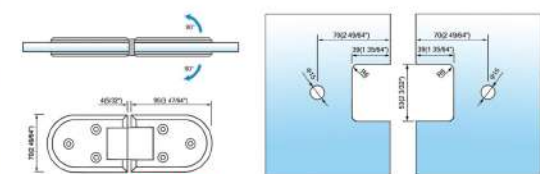


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weights: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2154

135° Glass-to-Glass

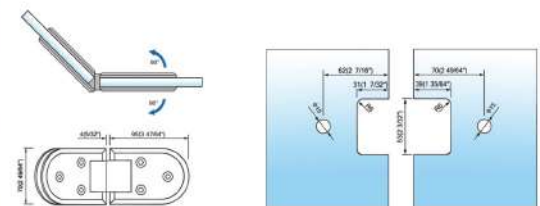


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weights: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2155

90° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10 or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weights: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2160


Wall Mount

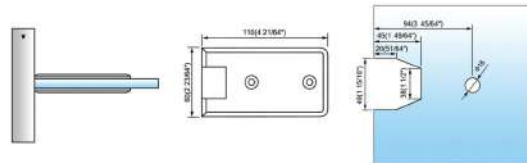

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2161

Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2162


Wall Mount
Offset Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2163

180° Glass-to-Glass

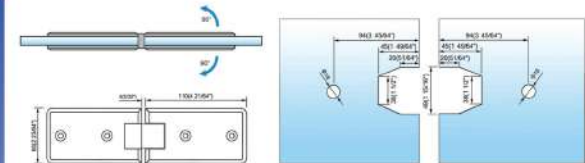


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2164

135° Glass-to-Glass

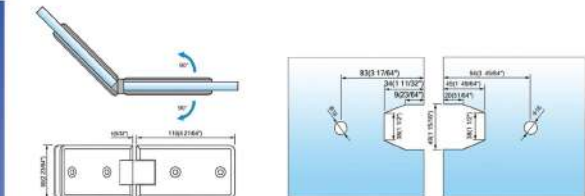


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2165


90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2170
Wall Mount

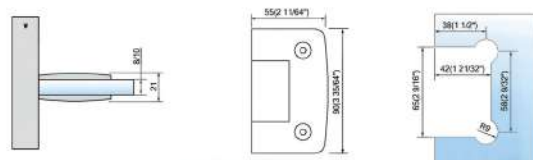

SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2171
Wall Mount
Full Back Plate

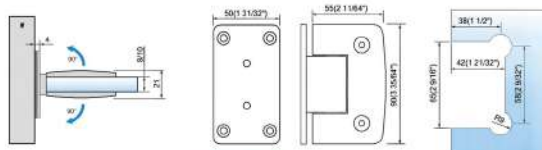

SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2172
Wall Mount
Offset Back Plate

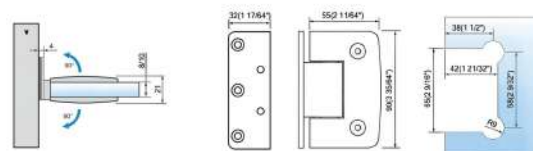

SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2173
180° Glass-to-Glass

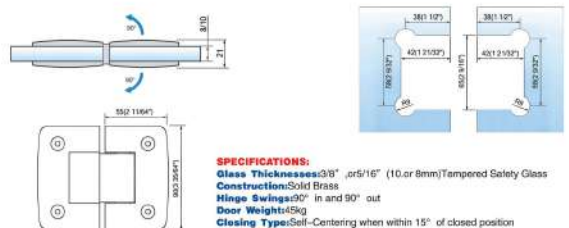

SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2174
135° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2175
90° Glass-to-Glass

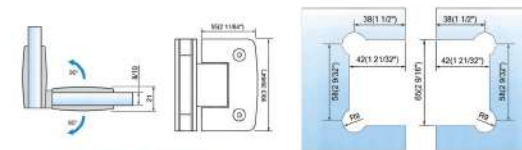

SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2176
Wall Mount
Full Back Plate

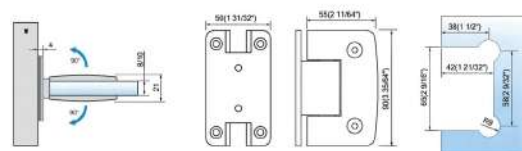


SPECIFICATIONS:
Glass Thicknesses: 3/8" .or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page





L-2190


Wall Mount



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2191

Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2192


Wall Mount
Offset Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2193

180° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2194

135° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2195


90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2196

Wall Mount
Full Back Plate


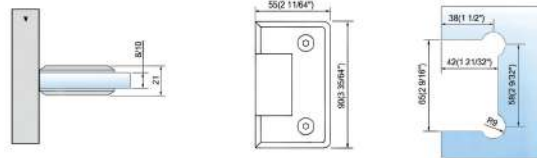
SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page





L-2210


Wall Mount



SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Stainless Steel
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2211

Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Stainless Steel
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2212


Wall Mount
Offset Back Plate


SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Stainless Steel
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2213

180° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Stainless Steel
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2214

135° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Stainless Steel
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2215

90° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10.or 8mm) Tempered Safety Glass
Construction: Stainless Steel
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-2220


Wall Mount

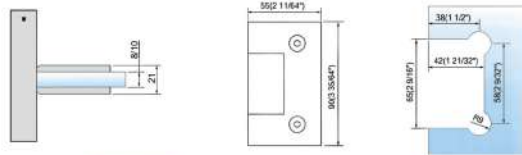

SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Stainless Steel
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page




L-2221

Wall Mount
Full Back Plate


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Stainless Steel
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2222


Wall Mount
Offset Back Plate


SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Stainless Steel
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2223

180° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Stainless Steel
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2224

135° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Stainless Steel
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page



L-2225

90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses:3/8" ,or5/16" (10.or 8mm) Tempered Safety Glass
Construction:Stainless Steel
Hinge Swings:90° in and 90° out
Door Weight:45kg
Closing Type:Self-Centering when within 15° of closed position
Finish:See the first page




LOIRE


Brass Shower Hinges




L-4142
360° Glass-to-Glass

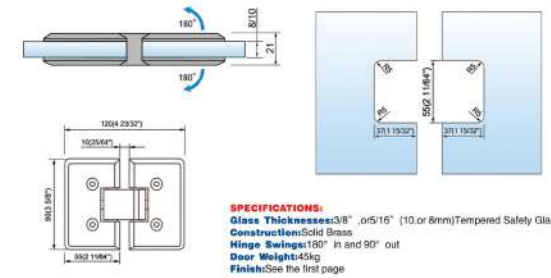

L-4152
360° Glass-to-Glass

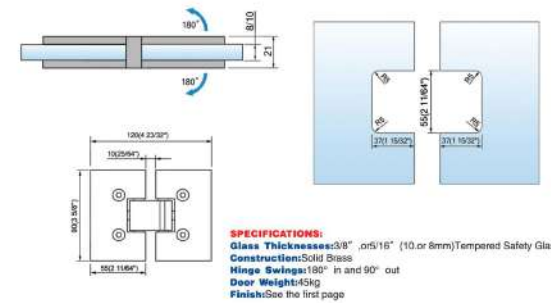


L-4162
360° Glass-to-Glass

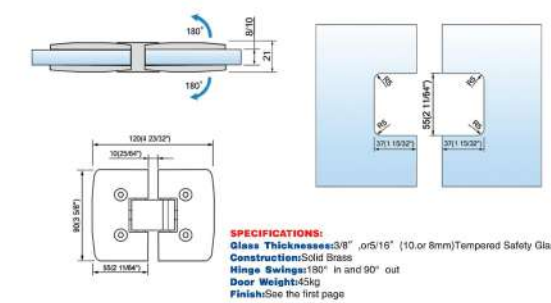



L-4201

Adjustable
Wall Mount
Full Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4202

Adjustable
Wall Mount
Offset Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4203

Adjustable
180° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4204

Adjustable
135° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4205

Adjustable
90° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4206

Adjustable
Wall Mount
Full Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Features: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4211

Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4212

Adjustable
Wall Mount
Offset Back Plate



SPECIFICATIONS:

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4213

Adjustable
180° Glass-to-Glass



SPECIFICATIONS:

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4214

Adjustable
135° Glass-to-Glass

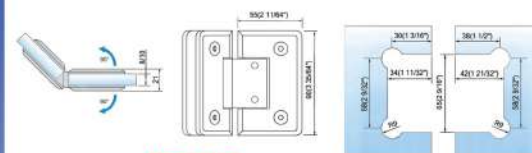

SPECIFICATIONS:

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4215

Adjustable
90° Glass-to-Glass



SPECIFICATIONS:

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4216


Adjustable
Wall Mount
Full Back Plate


SPECIFICATIONS:

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4221
Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4222
Adjustable
Wall Mount
Offset Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4223
Adjustable
180° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4224
Adjustable
135° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4225
Adjustable
90° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4226
Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4227
Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" , or 5/16" (10. or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: ≤5kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4241
Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4242
Adjustable
Wall Mount
Offset Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4243
Adjustable
180° Glass-to-Glass

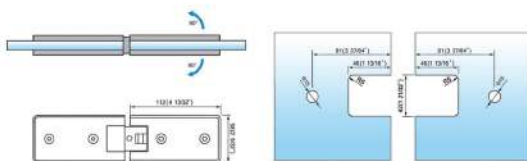

SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4244
Adjustable
135° Glass-to-Glass

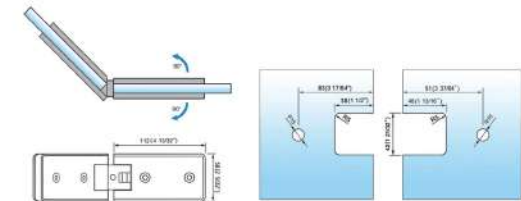

SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4245
Adjustable
90° Glass-to-Glass

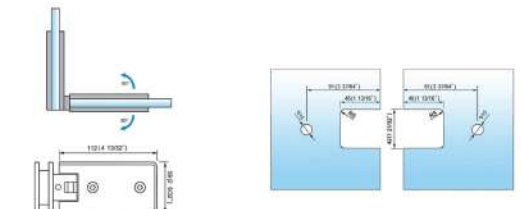


SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page





L-4251

Adjustable
Wall Mount
Full Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4252

Adjustable
Wall Mount
Offset Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4253

Adjustable
180° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4254

Adjustable
135° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4255

Adjustable
90° Glass-to-Glass




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4256


Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4261
Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4262
Adjustable
Wall Mount
Offset Back Plate

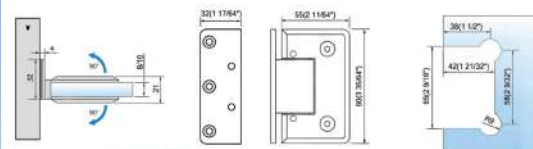

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4263
Adjustable
180° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4264
Adjustable
135° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4265
Adjustable
90° Glass-to-Glass

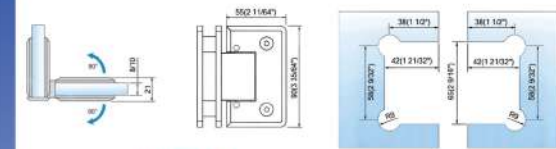

SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4266
Adjustable
Wall Mount
Full Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" ,or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4271

Adjustable
Wall Mount
Full Back Plate


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4272

Adjustable
Wall Mount
Offset Back Plate


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4273

Adjustable
180° Glass-to-Glass


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4274

Adjustable
135° Glass-to-Glass


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4275

Adjustable
90° Glass-to-Glass


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4276


Adjustable
Wall Mount
Full Back Plate

**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4281
Adjustable
Wall Mount
Full Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4282
Adjustable
Wall Mount
Offset Back Plate



SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4283
Adjustable
180° Glass-to-Glass

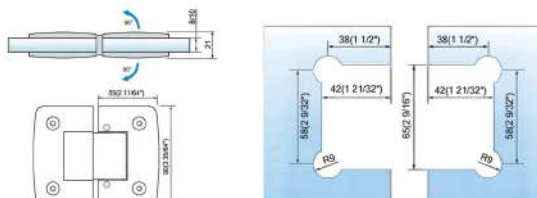

SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4284
Adjustable
135° Glass-to-Glass



SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-4285
Adjustable
90° Glass-to-Glass

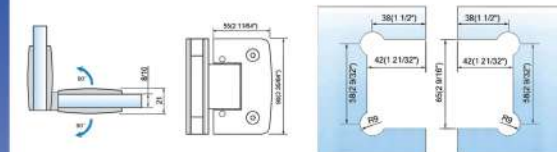

SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4286
Adjustable
Wall Mount
Full Back Plate




SPECIFICATIONS:
Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4291

Adjustable
Wall Mount
Full Back Plate


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4292

Adjustable
Wall Mount
Offset Back Plate


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4293

Adjustable
180° Glass-to-Glass


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4294

Adjustable
135° Glass-to-Glass


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4295

Adjustable
90° Glass-to-Glass


**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page



L-4296


Adjustable
Wall Mount
Full Back Plate

**SPECIFICATIONS:**

Glass Thicknesses: 3/8" or 5/16" (10 or 8mm) Tempered Safety Glass
Special Feature: Adjustable to any angle up to 90° without having to take door down
Construction: Solid Brass
Hinge Swings: 90° in and 90° out
Door Weight: 45kg
Closing Type: Self-Centering when within 15° of closed position
Finish: See the first page




L-2311
Top Or Bottom Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2312
Glass-to-Fixed Transom Mount

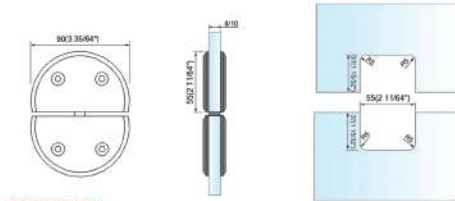

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2321
Top Or Bottom Mount

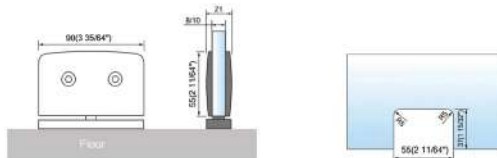

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2322
Glass-to-Fixed Transom Mount

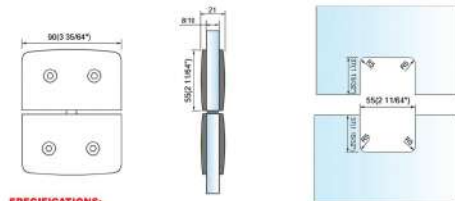

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2331
Top Or Bottom Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2332
Glass-to-Fixed Transom Mount

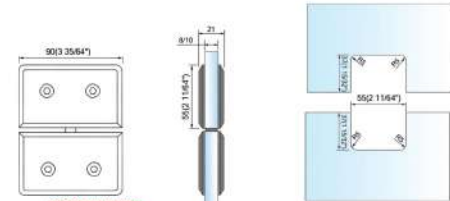

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2341
Top Or Bottom Mount

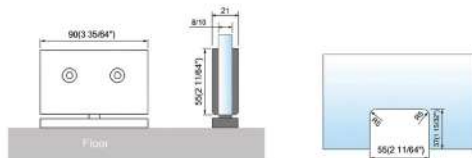

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2342
Glass-to-Fixed Transom Mount

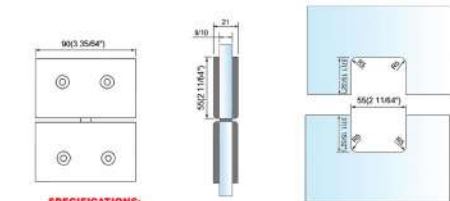


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




ADJUSTABLE ANGLE INSTRUCTIONS

1. Use 3mm Hex Wrench (A) to loosen both the front and rear screws (B) by turning one circle counter-clockwise. Then proceed with the adjustment.
2. Once you have aligned the door, tighten the screws (B).

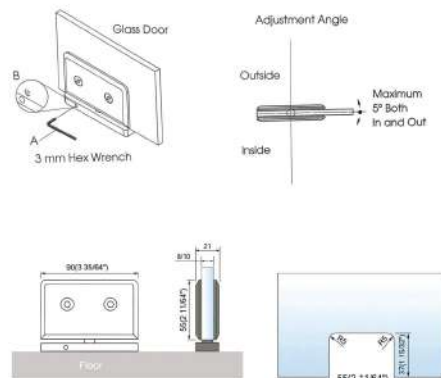

ADJUSTABLE ANGLE INSTRUCTIONS

1. Use 3mm Hex Wrench (A) to loosen both the front and rear screws (B) by turning one circle counter-clockwise. Then proceed with the adjustment.
2. Once you have aligned the door, tighten the screws (B).

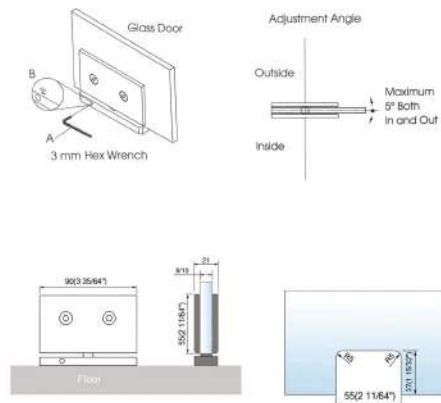



L-2351
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2352
Inline Panel Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2353
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2354
Inline Panel Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2355
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2356
Inline Panel Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2361L
Left Hand Mount Shown
Offset Bracket Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



L-2361R
Right Hand Mount Shown
Offset Bracket Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



Left Hand Mount Shown
Offset Bracket Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




Right Hand Mount Shown
Offset Bracket Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



Left Hand Mount Shown
Offset Bracket Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




Right Hand Mount Shown
Offset Bracket Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




Top Or Bottom Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




Top Or Bottom Mount
With Attached U-Clamp




SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page



Top Or Bottom Mount
With Attached U-Clamp



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Self-Centering when within 15° of closed position
Hinge Swing: Full Rotation
Finish: See The First Page




L-2411
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2412
Glass To Glass

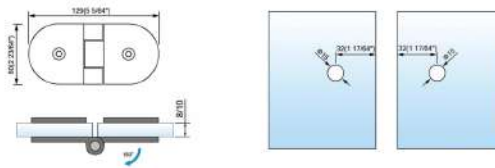

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2413W
Wall To Glass

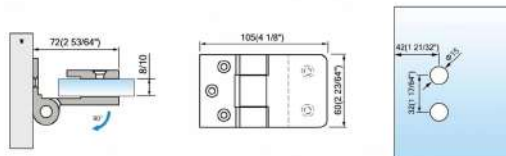

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2413
Glass To Glass

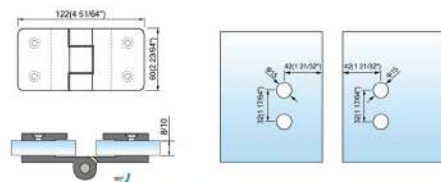

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2414W
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2414
Glass To Glass

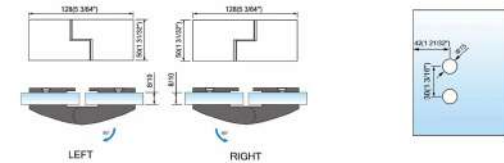

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2415
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2416
Glass To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2418W
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2418
Glass To Glass

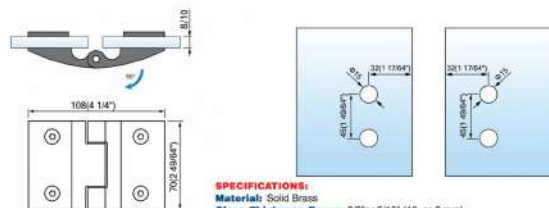

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2421
Wall To Glass

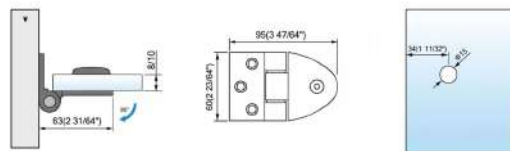

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2422
Glass To Glass

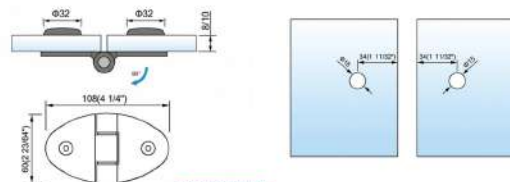

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2431
Wall To Glass

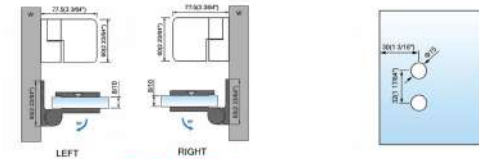

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2432
Glass To Glass

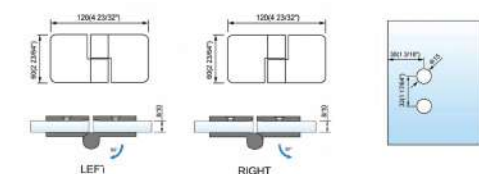

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2441
Wall To Glass

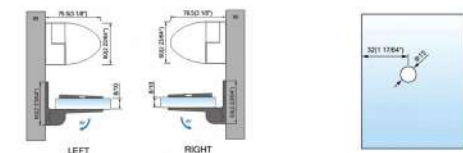

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2442
Glass To Glass

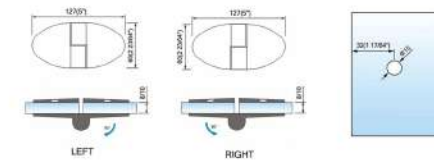


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page

LOIRE

Brass Shower Hinges



L-2471
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2472
Glass To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2481
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2482
Glass To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page

LOIRE

Stainless Steel Shower Hinges




L-2419W
Glass To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2419
Wall To Glass

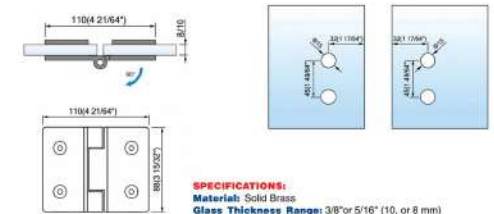

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page




L-2420W
Wall To Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2420
Glass To Glass

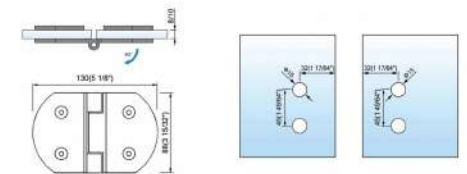


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Closing Type: Free Swinging
Hinge Swing: One-Sided Opening Outwards 90°
Finish: See The First Page



L-2501

Wall Mount

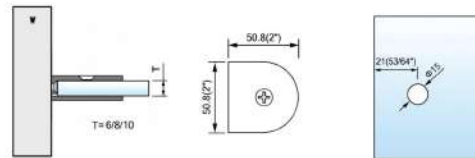


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2502

90° Wall-to-Glass

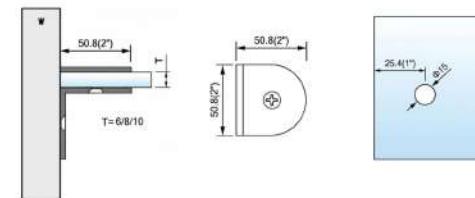


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2503

180° Wall-to-Glass




SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2504

180° Glass-to-Glass

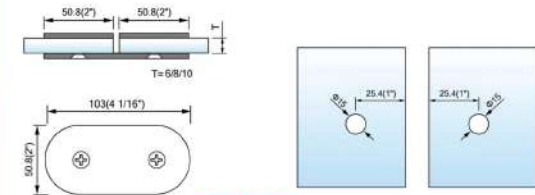


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2505

90° Glass-to-Glass




SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2506

135° Glass-to-Glass

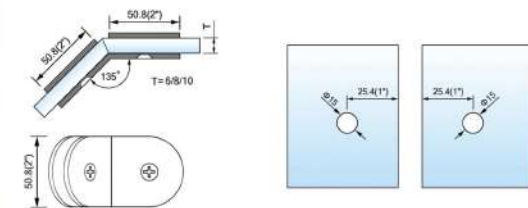


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2521

Wall Mount

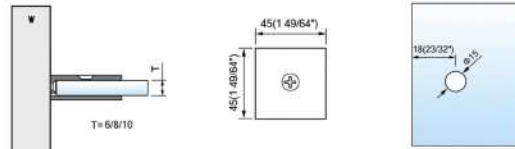


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2522

90° Wall-to-Glass

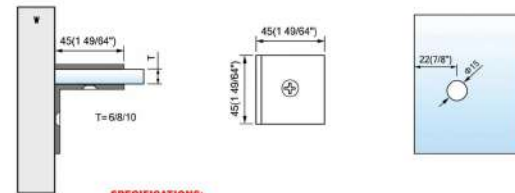


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2523

180° Wall-to-Glass




SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2524

180° Glass-to-Glass

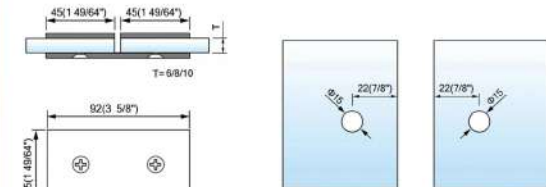


SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2525

90° Glass-to-Glass




SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2526


135° Glass-to-Glass

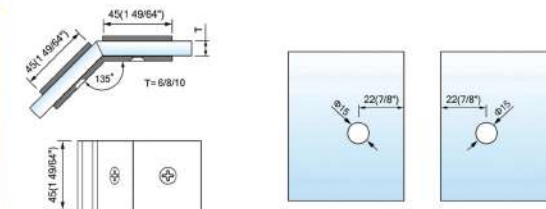

SPECIFICATIONS:
Material: Stainless Steel
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2531B
Wall Mount

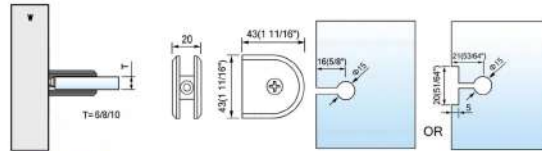

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2531
Wall Mount

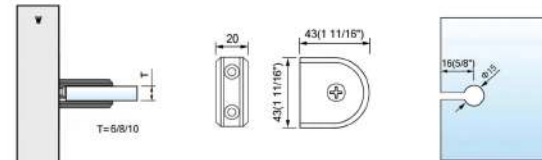

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2532
90° Wall-to-Glass

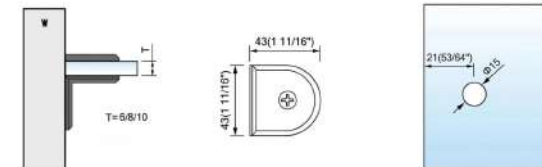

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2533
180° Wall-to-Glass

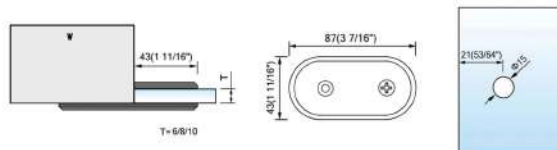

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2534
180° Glass-to-Glass

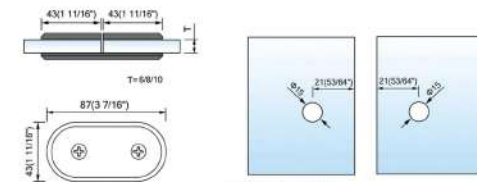

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2535
90° Glass-to-Glass

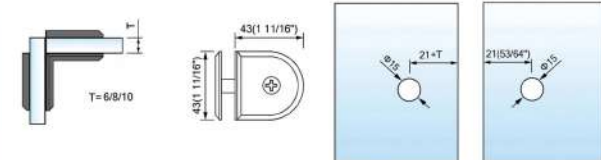


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2536
135° Glass-to-Glass

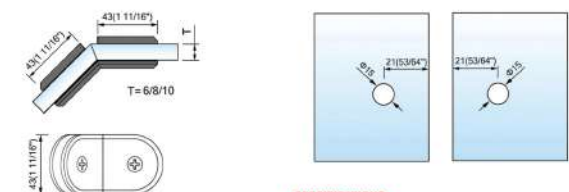

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2541B
Wall Mount

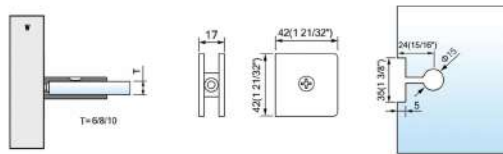

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2541
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2542
90° Wall-to-Glass

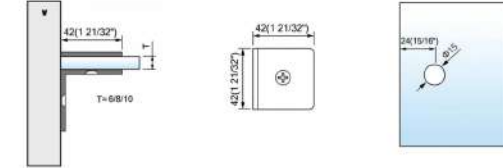

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2543
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2544
180° Glass-to-Glass

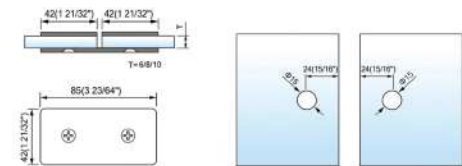

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2545
90° Glass-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>



L-2546
135° Glass-to-Glass

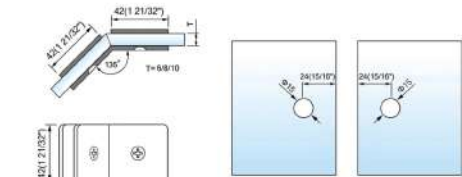

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>



L-2547
Adjustable Wall Mount Clamp



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2548
Adjustable Glass-to-Glass Clamp



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8\"/>




L-2551B
Wall Mount

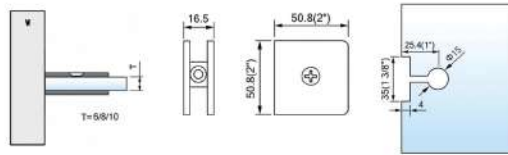

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2551
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2552
90° Wall-to-Glass

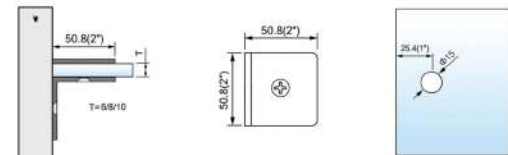

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2553
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2554
180° Glass-to-Glass

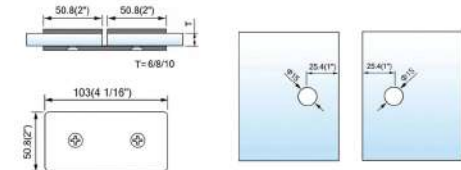

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2555
90° Glass-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2556
135° Glass-to-Glass

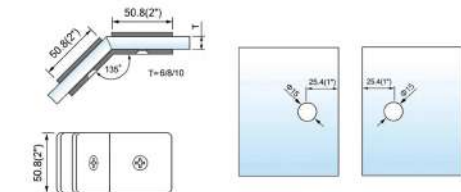

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2562
90° Wall-to-Glass

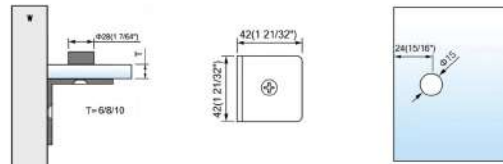

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2565
90° Glass-to-Glass

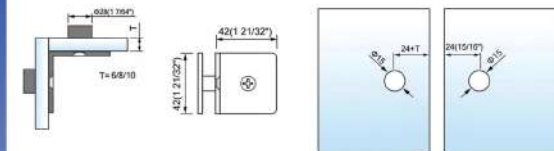

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2563
180° Wall-to-Glass

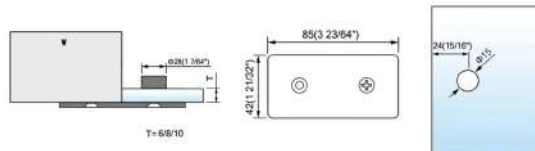

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2566
135° Glass-to-Glass

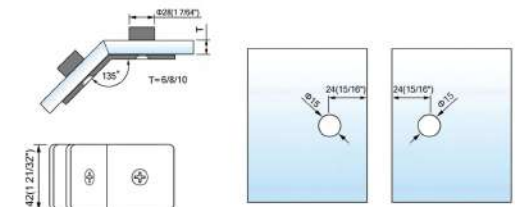


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2564
180° Glass-to-Glass

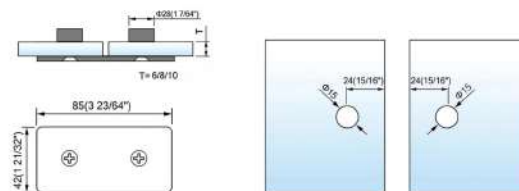


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page

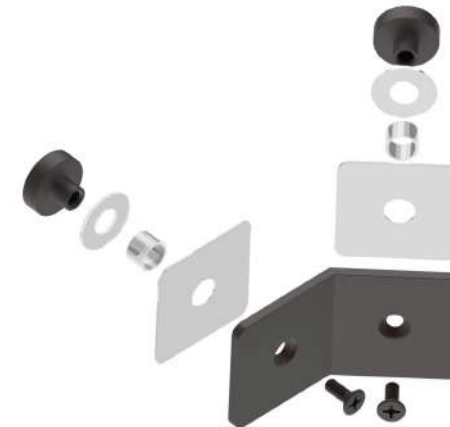




L-2581
Wall Mount

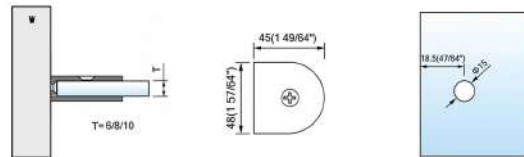

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2582
90° Wall-to-Glass

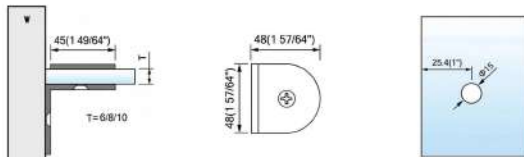

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2583
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2584
180° Glass-to-Glass

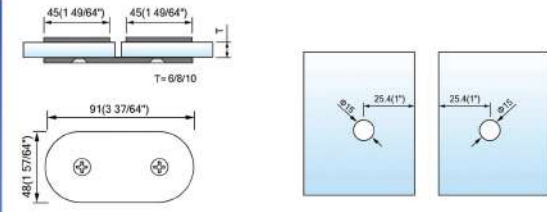

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2585
90° Glass-to-Glass

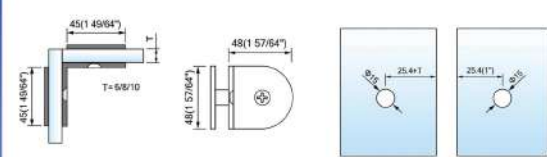

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2586
135° Glass-to-Glass

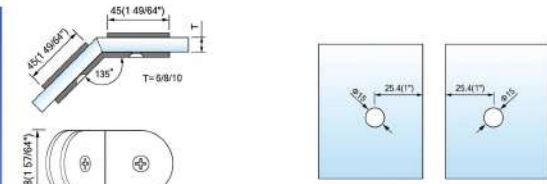

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2592

90° Wall-to-Glass

**SPECIFICATIONS:****Material:** Solid Brass**Glass Thickness Range:** 3/8" or 5/16" (10, or 8 mm)**Includes:** Mounting Screws and Gaskets**Finish:** See The First Page


L-2593

180° Wall-to-Glass

**SPECIFICATIONS:****Material:** Solid Brass**Glass Thickness Range:** 3/8" or 5/16" (10, or 8 mm)**Includes:** Mounting Screws and Gaskets**Finish:** See The First Page


L-2594

180° Glass-to-Glass

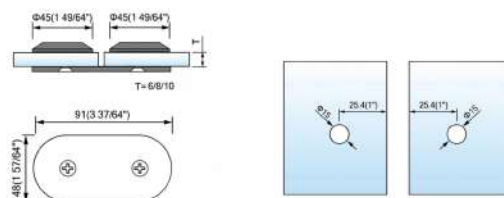**SPECIFICATIONS:****Material:** Solid Brass**Glass Thickness Range:** 3/8" or 5/16" (10, or 8 mm)**Includes:** Mounting Screws and Gaskets**Finish:** See The First Page


L-2595

90° Glass-to-Glass

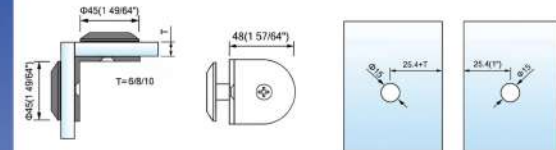**SPECIFICATIONS:****Material:** Solid Brass**Glass Thickness Range:** 3/8" or 5/16" (10, or 8 mm)**Includes:** Mounting Screws and Gaskets**Finish:** See The First Page


L-2596

135° Glass-to-Glass

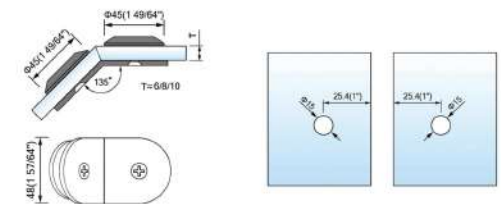**SPECIFICATIONS:****Material:** Solid Brass**Glass Thickness Range:** 3/8" or 5/16" (10, or 8 mm)**Includes:** Mounting Screws and Gaskets**Finish:** See The First Page




L-2601
Wall Mount

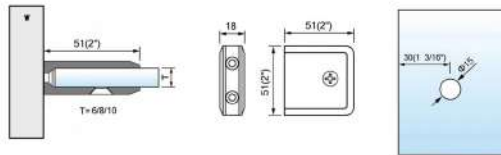

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2602
90° Wall-to-Glass

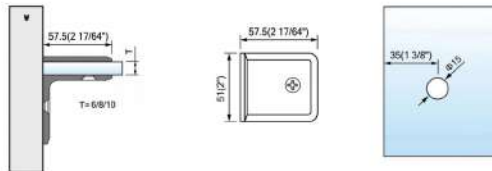

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2603
180° Wall-to-Glass

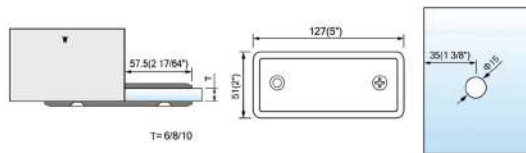

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2604
180° Glass-to-Glass

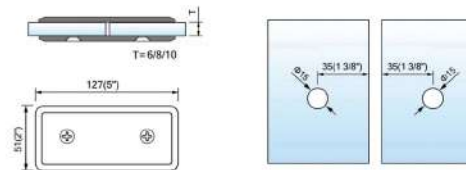

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2605
90° Glass-to-Glass

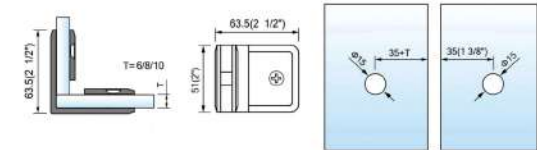

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2606
135° Glass-to-Glass

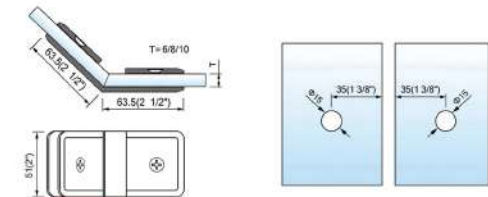

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2607
T Glass-to-Glass

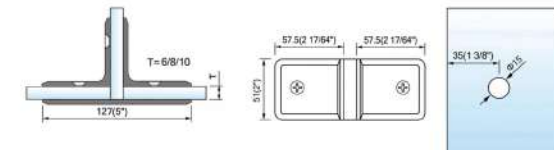

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2611B
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2611
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2612
90° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2613
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2614
180° Glass-to-Glass

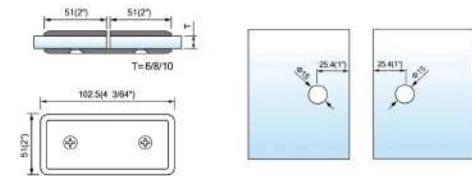

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2615
90° Glass-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2616
135° Glass-to-Glass

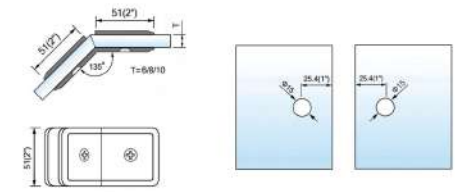

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2621B
Wall Mount




SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2621
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2622
90° Wall-to-Glass

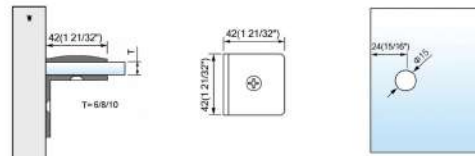

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2623
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2624
180° Glass-to-Glass

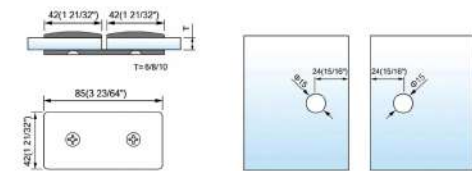

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2625
90° Glass-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2626
135° Glass-to-Glass

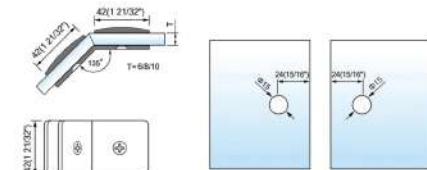


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2631

Wall Mount

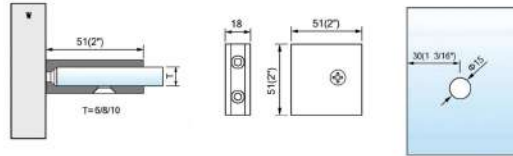


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2634

180° Glass-to-Glass

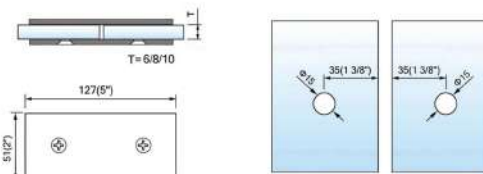


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2635

90° Glass-to-Glass

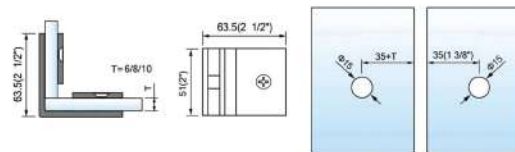


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2636

135° Glass-to-Glass

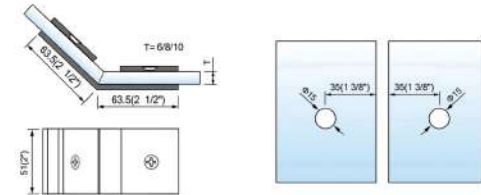


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2637

T Glass-to-Glass




SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page

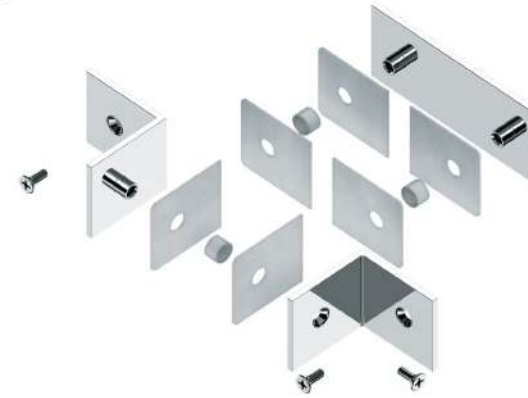





L-2641
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2641B
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2642
90° Wall-to-Glass

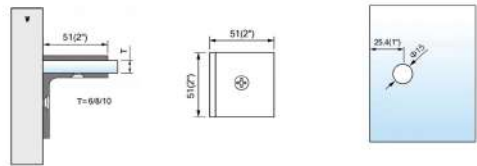

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2643
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2644
180° Glass-to-Glass

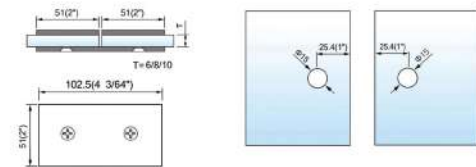

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2645
90° Glass-to-Glass

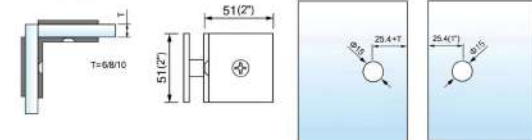

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2646
135° Glass-to-Glass

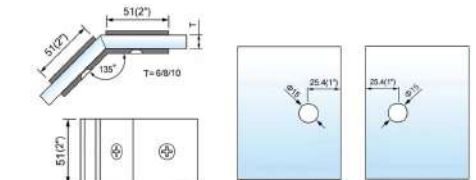

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2652
90° Wall-to-Glass

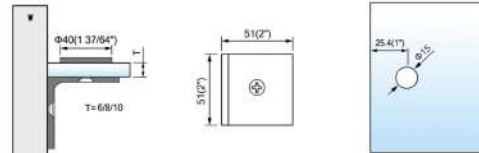

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2653
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2654
180° Glass-to-Glass

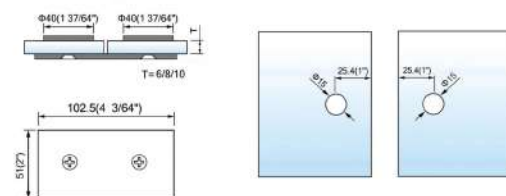

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2655
90° Glass-to-Glass




SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2656
135° Glass-to-Glass

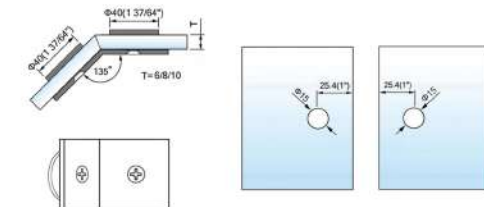


SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page

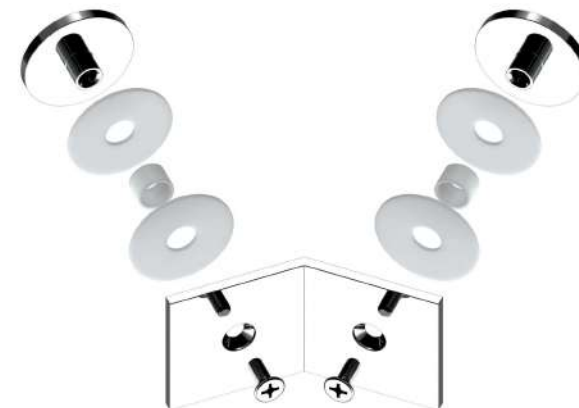



L-2662

90° Wall-to-Glass

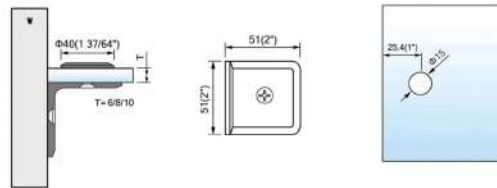

SPECIFICATIONS:

Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2665

90° Glass-to-Glass

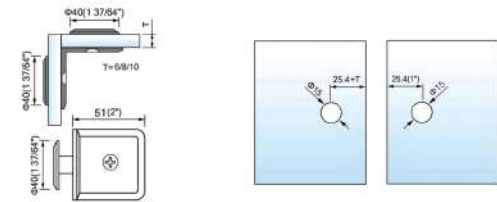

SPECIFICATIONS:

Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2663

180° Wall-to-Glass

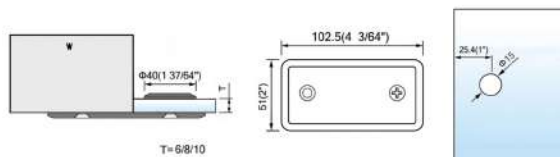

SPECIFICATIONS:

Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page



L-2666

135° Glass-to-Glass

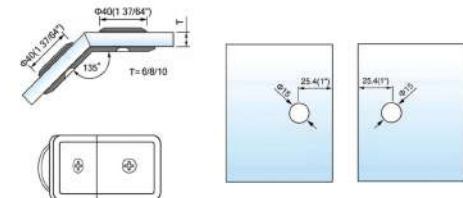

SPECIFICATIONS:

Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2664

180° Glass-to-Glass

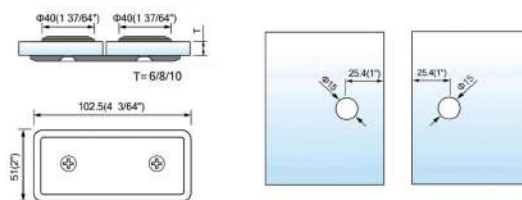

SPECIFICATIONS:

Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page






L-2671B
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2671
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2672
90° Wall-to-Glass

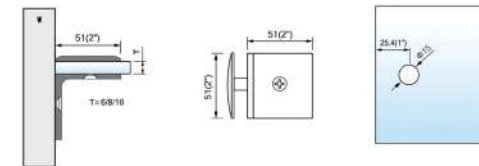

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2673
180° Wall-to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2674
180° Glass-to-Glass

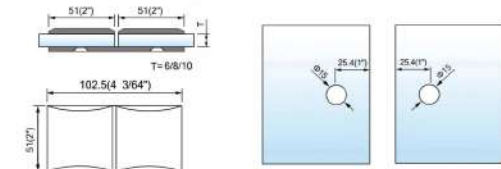

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2675
90° Glass-to-Glass

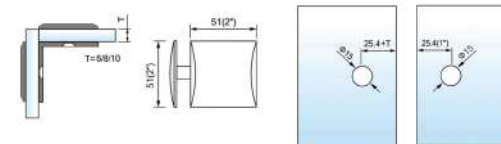

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2676
135° Glass-to-Glass

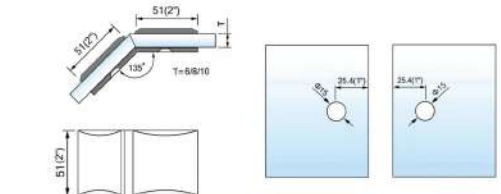

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2681B
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2681
Wall Mount



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2682
90° Wall -to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2683
180° Wall -to-Glass



SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2684
180° Glass-to-Glass

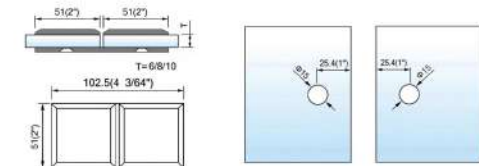

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2685
90° Glass-to-Glass

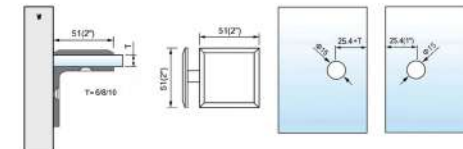

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




L-2686
135° Glass-to-Glass

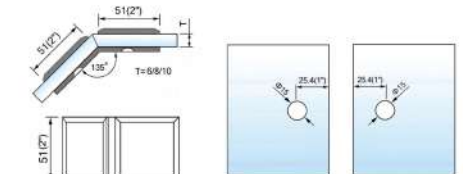

SPECIFICATIONS:
Material: Solid Brass
Glass Thickness Range: 3/8" or 5/16" (10, or 8 mm)
Includes: Mounting Screws and Gaskets
Finish: See The First Page




S001S-90°
Standard application

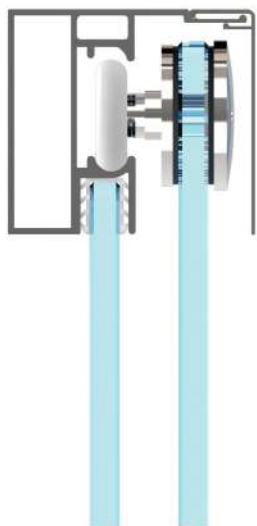

Item No.	Picture	Q'ty
S001S-00 Polished Anodized Aluminium Top Track		2pcs
S001-01 Mounting Bracket		2pcs
S001S-02 Plastic Connector		1pcs
S001-03 Nylon Floor Guide		1pcs
S001-04 Wheel		2pcs
S001-05A Stopper		2pcs
LS-277		1pcs
S001-08 tool		1pcs



S001S-180°
Standard application


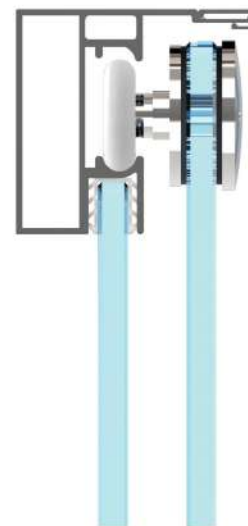


Item No.	Picture	Q'ty
S001S-00 Polished Anodized Aluminium Top Track		1pcs
S001-01 Mounting Bracket		2pcs
S001-03 Nylon Floor Guide		1pcs
S001-04 Wheel		2pcs
S001-05A Stopper		2pcs
LS-277		1pcs
S001-08 tool		1pcs

MODEL: S001-90°




Item No.	Picture	Q'ty
S001-00 Polished Anodised Aluminium Top Track		2pcs
S001-01 Mounting Bracket		2pcs
S001-02 Plastic Connector		1pcs
S001-03 Nylon Floor Guide		1pcs
S001-04 Wheel		2pcs
S001-05A Stopper		2pcs
S001-06 Ø50 Door Knob for sliding Door		1pcs
S001-07 Ø32 Door Knob for Sliding Door		1pcs
S001-08 tool		1pcs

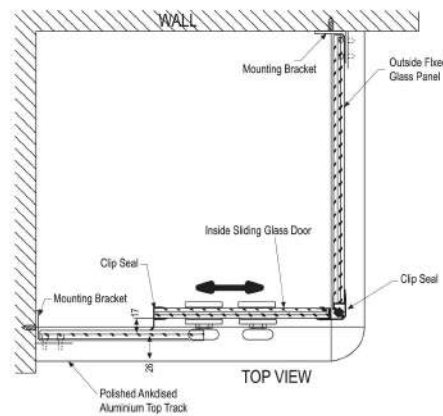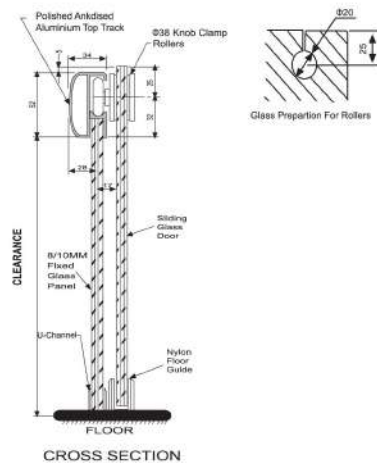

* Either S001-06 or S001-07

MODEL: S001-180°

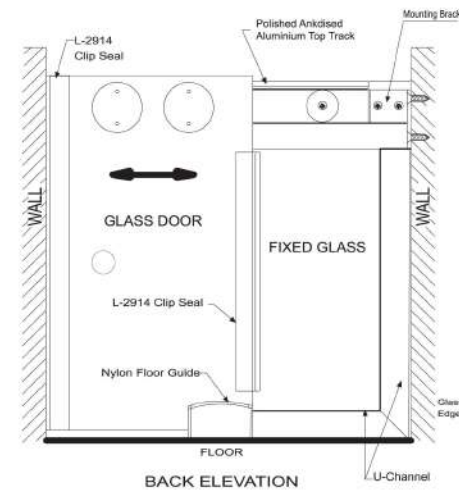


Item No.	Picture	Q'ty
S001-00 Polished Anodised Aluminium Top Track		1pcs
S001-01 Mounting Bracket		2pcs
S001-03 Nylon Floor Guide		1pcs
S001-04 Wheel		2pcs
S001-05A Stopper		2pcs
S001-06 Ø50 Door Knob for sliding Door		1pcs
S001-07 Ø32 Door Knob for Sliding Door		1pcs
S001-08 tool		1pcs

* Either S001-06 or S001-07




S002
Standard application

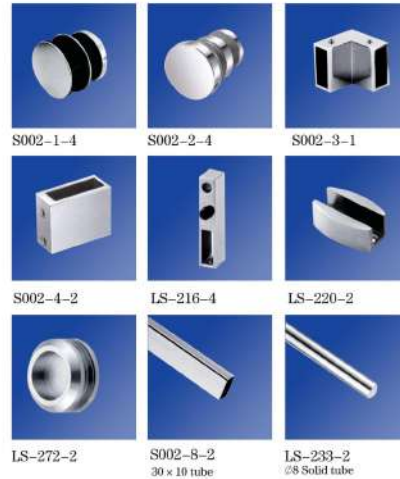

Above application is just for reference, will be changed according to the actual scene.



S003
Standard application

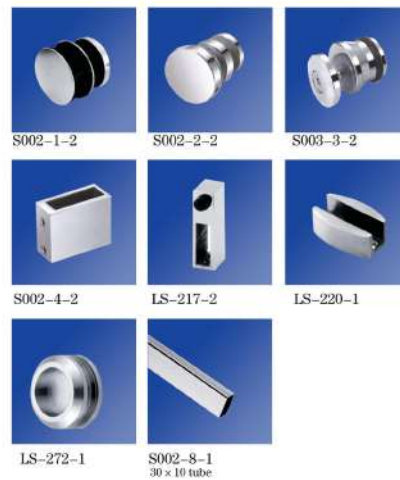

Above application is just for reference, will be changed according to the actual scene.

MATERIAL: Stainless steel DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)



S004
Standard application



Above application is just for reference, will be changed according to the actual scene.



S005
Standard application



Above application is just for reference, will be changed according to the actual scene.

MATERIAL: Stainless steel DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)



S006
Standard application



Above application is just for reference, will be changed according to the actual scene.



S007
Standard application



Above application is just for reference, will be changed according to the actual scene.

MATERIAL: Stainless steel DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)



S008
Standard application



Above application is just for reference, will be changed according to the actual scene.



S009
Standard application



Above application is just for reference, will be changed according to the actual scene.

MATERIAL: Stainless steel DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)



S010
Standard application



Above application is just for reference, will be changed according to the actual scene.




S011
Standard application



Above application is just for reference, will be changed according to the actual scene.


MATERIAL: Stainless steel DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)

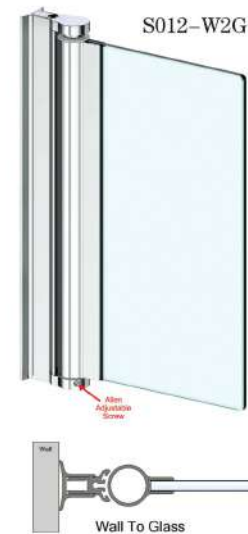

SPECIFICATIONS:
Glass Thicknesses:
15/64" or 5/16" (6 or 8 mm)
Tempered Safety Glass
Special Feature: Adjustable
in or out to assist with
desired door alignment
Construction: Aluminum
Hinge Swings:
90° in and 90° out
Closing Type:
Lifting and lowering function



SPECIFICATIONS:
Glass Thicknesses:
15/64" or 5/16" (6 or 8 mm)
Tempered Safety Glass
Special Feature: Adjustable
in or out to assist with
desired door alignment
Construction: Aluminum
Hinge Swings:
90° in and 90° out
Closing Type:
Lifting and lowering function

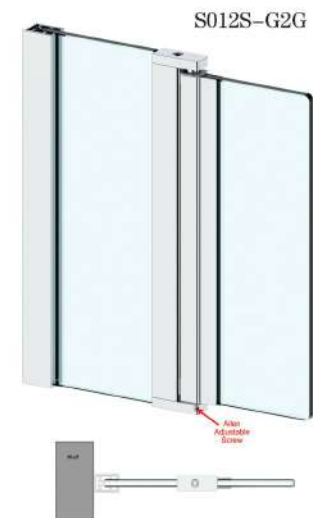



S013
Standard application



S013-0
SLIDING SHOWER DOOR UPPER TRACK
The extruded aluminum Sliding Shower Door Upper Track is available in two lengths and four finishes. You can easily cut to length for your installation. Longer lengths available.



S013-2
SLIDING DOOR HANGER KIT
Kit consists of two Rollers, two Glass Hangers, and two Snap-In Screw Covers.



S013-3
SLIDING DOOR FLOOR GUIDE KIT
Kit consists of one Floor Guide and two Screws.



S013-4
180° GLASS-TO-SLIDING TRACK CONNECTOR
For attaching the fixed glass to the Sliding Shower Door Upper Track in 180° installations.



S013-5
ROLLER STOP KIT
Kit consists of two Roller Stops with Screws.



S013-7
90° GLASS-TO-SLIDING TRACK CONNECTOR
For attaching the fixed glass to the Sliding Shower Door Upper Track in 90° installations.




S013-8
90° WALL-TO-UPPER TRACK CONNECTOR
For attaching the Sliding Shower Door Upper Track to a wall at 90°.



S013-9
90° WALL-TO-UPPER TRACK CONNECTOR
For attaching the Sliding Shower Door Upper Track to a wall at 90°. Includes two Screws and Snap-In Screw Covers.



S014
Standard application



S014-0
SLIDING SHOWER DOOR UPPER TRACK
The extruded aluminum Sliding Shower Door Upper Track is available in two lengths and four finishes. You can easily cut to length for your installation. Longer lengths available.



S014-2
SLIDING DOOR HANGER KIT
Kit consists of two Rollers, two Glass Hangers, and two Snap-In Screw Covers.



S014-9
90° WALL-TO-GLASS BRACKET
For securing a glass panel at 90° to the wall. Includes two Screws and Snap-In Screw Covers.



S014-3
SLIDING DOOR FLOOR GUIDE KIT
Kit consists of one Floor Guide and two Screws.



S014-4
180° GLASS-TO-SLIDING TRACK CONNECTOR
For attaching the fixed glass to the Sliding Shower Door Upper Track in 180° installations.



S013-5
ROLLER STOP KIT
Kit consists of two Roller Stops with Screws.



S014-7
90° GLASS-TO-SLIDING TRACK CONNECTOR
For attaching the fixed glass to the Sliding Shower Door Upper Track in 90° installations.



S013-8
90° WALL-TO-UPPER TRACK CONNECTOR
For attaching the Sliding Shower Door Upper Track to a wall at 90°.



S015
Standard application



LS-202D-2pcs
Anti-Lift Single Top Rpller



LS-255D-4pcs
Wall Mount



LS-213-2pcs
Stopper



LS-272-1pcs



LS-220-1pcs
Floor Guide



LS-227-2pcs
End Cap



LS-232-1
25 tube

MATERIAL: Stainless steel DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)



S016
Standard application




Shown With
Square Clamp



Fixed Glass
Connection To Header



S016-0
Upper Track

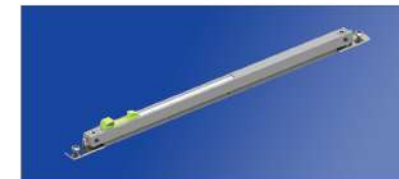

S016-1
Kits For Soft Closing



S016-2
Top Roller



S016-3
Wall Mount



S016-4
90 DEGREE
GLASS-TO-SLIDING
TRACK CONNECTOR



S016-5
180 DEGREE
GLASS-TO-SLIDING
TRACK CONNECTOR



S016-6
Guide


MATERIAL: Aluminum DOOR WEIGHT: 60 kgs maximum
FINISH: Polished Stainless Steel (PSS) Satin Stainless Steel (SSS) Titanium Plated (TI)



L-2701




SIZE:(mm)
2701A L=850-1000
2701B L=1000-1150



L-2702




SIZE:(mm)
2702A L=750-1050
2702B L=1050-1350



L-2703




SIZE:(mm)
2703A L=240-400
2703B L=550-700



L-2704




SIZE:(mm)
2704A L=350
2704B L=620



L-2705



SIZE:(mm)
2705A L=300
2705B L=600




FEATURES: For 6mm to 12mm glass
MATERIAL: Brass, Stainless Steel
FINISH: Bright Chrome Plated (CP) Satin Chrome Plated (SCP) Brushed Nickel (BN) Polished Brass (PB)
Titanium Plated (TI) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS)



L-2706




SIZE:(mm)
2706A L=350
2706B L=620



L-2861




SIZE:(mm)
2861A L=850-1000
2861B L=1000-1150



L-2862




SIZE:(mm)
2862A L=750-1050
2862B L=1050-1350



L-2863




SIZE:(mm)
2863A L=240-400
2863B L=550-700



L-2864



SIZE:(mm)
2864A L=350
2864B L=620



FEATURES: For 6mm to 12mm glass
MATERIAL: Brass, Stainless Steel
FINISH: Bright Chrome Plated (CP) Satin Chrome Plated (SCP) Brushed Nickel (BN) Polished Brass (PB)
Titanium Plated (TI) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS)



L-2707 Typical Wall-to-Glass Installation
Wall-to-Glass Support Bar



SPECIFICATIONS:

Materials:
3/4" (19 mm) Diameter Stainless Steel 304 Tube
Solid Brass Fittings
Bar Lengths: 39" and 51" (1 and 1.3 m)
Glass Thickness Range: 3/8", 5/16" or 1/4" (10, 8 or 6 mm)
Includes: All Required Mounting Hardware













L-2708 Typical Glass-to-Glass Installation
Glass-to-Glass Support Bar



SPECIFICATIONS:


Materials:
3/4" (19 mm) Diameter Stainless Steel 304 Tube
Solid Brass Fittings
Bar Lengths: 39" and 51" (1 and 1.3 m)
Glass Thickness Range: 3/8", 5/16" or 1/4" (10, 8 or 6 mm)
Includes: All Required Mounting Hardware



FEATURES: For 6mm to 10mm glass

MATERIAL: Brass/Stainless steel

FINISH: Bright Chrome Plated (CP) Satin Chrome Plated (SCP)
Brushed Nickel (BN) Titanium Plated (TI) Polished Brass (PB)

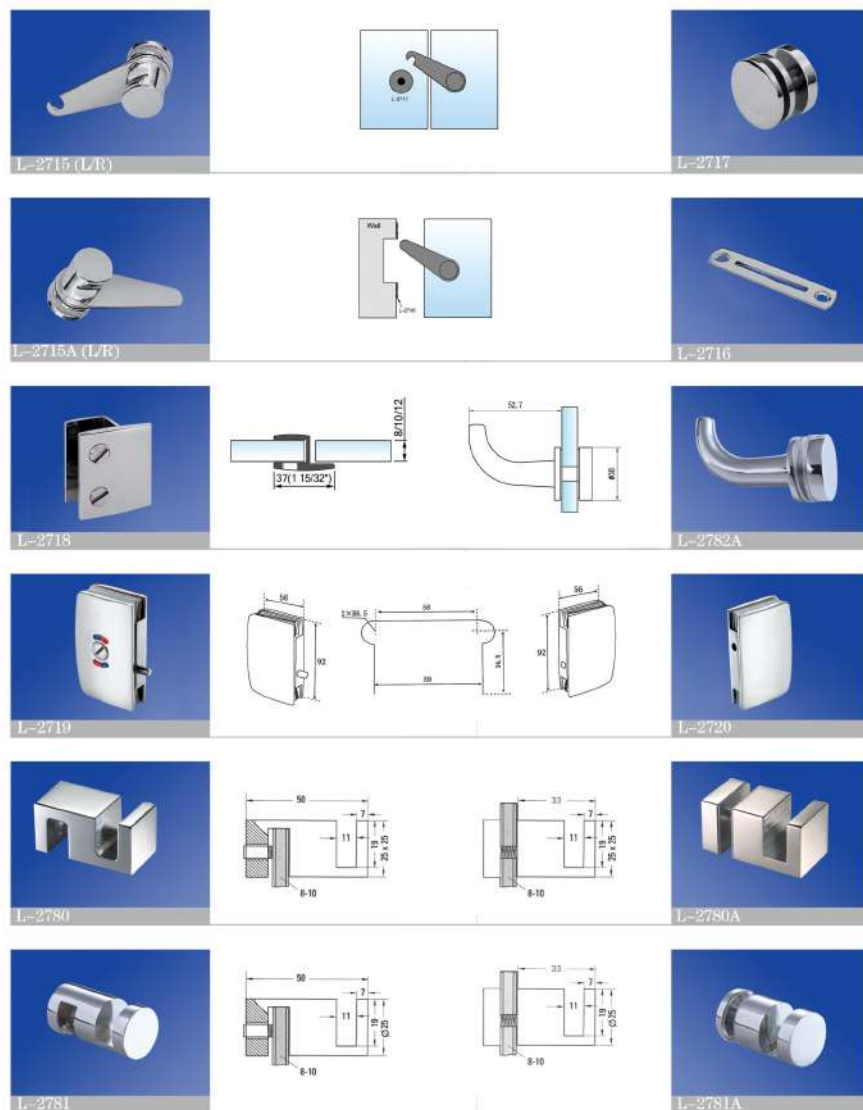


FEATURES: MATERIAL: Brass FINISH: Bright Chrome Plated (CP) Brushed Nickel (BN)
Satin Chrome Plated (SCP) Titanium Plates (Ti) Oil Rubbed Bronze (ORB)

Support Bar Accessories



FEATURES: For 6mm to 12mm glass
MATERIAL: Brass/Stainless steel
FINISH: Bright Chrome Plated (CP) Satin Chrome Plated (SCP) Brushed Nickel (BN)
Titanium Plated (Ti) Polished Brass (PB) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS)

Support Bar Accessories











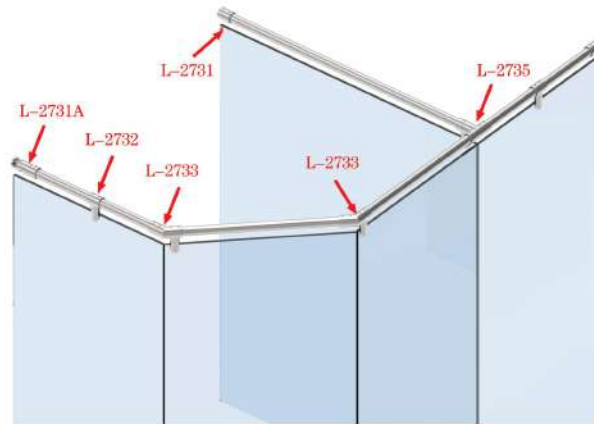


FEATURES: For 6mm to 12mm glass
 MATERIAL: Brass/Stainless steel
 FINISH: Bright Chrome Plated (CP) Satin Chrome Plated (SCP) Brushed Nickel (BN)
 Titanium Plated (TI) Polished Brass (PB) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS)





Square Support Bar And
Accessory Fittings










FEATURES: For 6mm to 12mm glass
 MATERIAL: Brass/Stainless steel
 FINISH: Bright Chrome Plated (CP) Satin Chrome Plated (SCP) Brushed Nickel (BN)
 Titanium Plated (TI) Polished Brass (PB) Polished Stainless Steel (PSS) Satin Stainless Steel (SSS)
















Shower Door Header Kits



















A	B
8.3(21/64")	12.3(31/64)
10.3(13/32")	14.3(9/16")
12.3(31/64")	16.3(41/64)



138



FEATURES: MATERIAL: Stainless steel, Brass FINISH: Bright Chrome Plated(CP) Satin Chrome Plated (SCP)
Brushed Nickel (BN) Titanium Plated(TI) Polished Brass(PB) Polished Stainless Steel(PSS)
Satin Stainless Steel(SSS)





L-2810

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2810A

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2830

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2830A

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2840

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2840A

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2850

SPECIFICATIONS:

Material: 3/4" (19 mm) Square Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2870

SPECIFICATIONS:

Material: 3/4" (19 mm) Diameter Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2814

SPECIFICATIONS:


Material: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2814A

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2834

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2834A

SPECIFICATIONS:


Material: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2844

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2844A

SPECIFICATIONS:

Material: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
With Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2854

SPECIFICATIONS:

Material: 3/4" (19 mm) Square Stainless Steel Tubing;
Without Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2874

SPECIFICATIONS:

Material: 3/4" (19 mm) Diameter Stainless Steel Tubing;
Without Metal Washers;
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2815

SPECIFICATIONS:

Materials: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
With Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2815A

SPECIFICATIONS:

Materials: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
With Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2835

SPECIFICATIONS:

Materials: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
Without Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2835A

SPECIFICATIONS:

Materials: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
Without Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2845

SPECIFICATIONS:

Materials: 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;
With Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2845A

SPECIFICATIONS:

Materials: 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;
With Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2855

SPECIFICATIONS:

Materials: 3/4" (19 mm) Square Stainless Steel Tubing;
Without Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2875

SPECIFICATIONS:

Materials: 3/4" (19 mm) Diameter Stainless Steel Tubing;
Without Metal Washers; Knob is Solid Brass
Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 12"-24" Towel Bar



L-2816

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;

With Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2816A

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;

With Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2836

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;

Without Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2836A

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;

Without Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2846

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) or 1" (25 mm) Diameter Brass or Stainless Steel Tubing;

With Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2846A

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) or 1" (25 mm) Diameter Stainless Steel Tubing;

With Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2856

Pull Handle



Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) Square Stainless Steel Tubing;

Without Metal Washers;

Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar

L-2876

Pull Handle




Back to Back Tower Bar

SPECIFICATIONS:**Material:** 3/4" (19 mm) Diameter Stainless Steel Tubing;

Without Metal Washers;


Glass Thickness Range: 1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)**Hole Diameter Required:** 1/2" (12 mm)**Available Size:** 6"-10" Pull / 12"-24" Towel Bar



SPECIFICATIONS:
Material: Stainless Steel Tubing;
Glass Thickness Range:
1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar




SPECIFICATIONS:
Material: Stainless Steel Tubing;
Glass Thickness Range:
1/2", 3/8", 5/16", or 1/4" (12, 10, 8, or 6 mm)
Hole Diameter Required: 1/2" (12 mm)
Available Size: 6"-10" Pull/12"-24" Towel Bar



L-2900
Glass To Glass 180°



L-2901
Glass To Glass 180°




L-2902
Glass To Glass 135°




L-2903
Glass To Glass 90°


FEATURES: For 6, 8, 10, 12mm glass LENGTH: 7"(2.13m)



L-2905
Glass To Floor




L-2906
Glass To Floor




L-2907
Glass To Glass 180°




L-2908
Glass To Glass 135°




L-2904
Glass To Floor




L-2910
Glass To Floor



L-2911
Glass To Floor

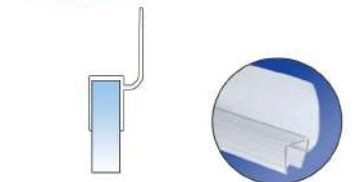

L-2912
Glass To Floor

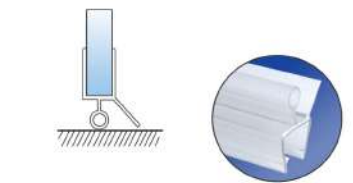


L-2913
Glass To Floor


FEATURES: For 6, 8, 10, 12mm glass LENGTH: 7"(2.13m)



L-2909
Glass To Glass 90°




L-2914
Glass To Floor



L-2915
Glass To Glass 180°



L-2918
Glass To Glass



L-2919
Glass To Floor



L-9001
Hook
Size:50x50x55mm



L-9006
Tower bar
Size:650x70x50mm



L-9004
Paper holder
Size:135x140x9mm



L-9002
Soap dish
Size:110x155x65mm



L-9006A
Double towel bar
Size:650x110x50mm



L-9005
Towel ring
Size:160x180x60mm



L-9003
Glass holder
Size:70x100x100mm



L-9007
Double towel rack
Size:650x205x50mm



L-9003A
Double glass holder
Size:155x105x100mm



L-9008
Glass shelf
Size:600x135x47mm



L-9009
Toilet brush holder
Size:120x165x380mm

FEATURES:
MATERIAL:Brass

FINISH:Bright Chrome Plated (CP)
Satin Chrome Plated (SCP)
Titanium Plated (TI)



L-9031
Hook
Size:50 × 50 × 55mm



L-9036
Tower bar
Size:650 × 70 × 50mm



L-9034
Paper holder
Size:135 × 140 × 9mm



L-9032
Soap dish
Size:110 × 155 × 65mm



L-9036A
Double towel bar
Size:650 × 110 × 50mm



L-9035
Towel ring
Size:160 × 180 × 60mm



L-9033
Glass holder
Size:70 × 100 × 100mm



L-9037
Double towel rack
Size:650 × 205 × 50mm



L-9033A
Double glass holder
Size:155 × 105 × 100mm



L-9038
Glass shelf
Size:600 × 135 × 47mm



L-9039
Toilet brush holder
Size:120 × 165 × 380mm

FEATURES:
MATERIAL:Brass

FINISH:Bright Chrome Plated (CP)
Satin Chrome Plated (SCP)
Titanium Plated (TI)



L-9081
Hook
Size:50 × 50 × 55mm



L-9086
Tower bar
Size:650 × 70 × 50mm



L-9084
Paper holder
Size:135 × 140 × 9mm



L-9082
Soap dish
Size:110 × 155 × 65mm



L-9086A
Double towel bar
Size:650 × 110 × 50mm



L-9085
Towel ring
Size:160 × 180 × 60mm



L-9087
Double towel rack
Size:650 × 205 × 50mm



L-9083
Glass holder
Size:70 × 100 × 100mm



L-9088
Glass shelf
Size:600 × 135 × 47mm



L-9089
Toilet brush holder
Size:120 × 165 × 380mm

FEATURES:
MATERIAL:Brass

FINISH:Bright Chrome Plated (CP)
Satin Chrome Plated (SCP)
Titanium Plated (TI)



L-9091
Hook
Size:50 × 50 × 55mm



L-9096
Tower bar
Size:650 × 70 × 50mm



L-9094
Paper holder
Size:135 × 140 × 9mm



L-9092
Soup dish
Size:110 × 155 × 65mm



L-9096A
Double towel bar
Size:650 × 110 × 50mm



L-9095
Towel ring
Size:160 × 180 × 60mm



L-9097
Double towel rack
Size:650 × 205 × 50mm



L-9093
Glass holder
Size:70 × 100 × 100mm



L-9098
Glass shelf
Size:600 × 135 × 47mm



L-9099
Toilet brush holder
Size:120 × 165 × 380mm

FEATURES:
MATERIAL:Brass

FINISH:Bright Chrome Plated (CP)
Satin Chrome Plated (SCP)
Titanium Plated (TI)



L-9111
Hook
Size:50 × 50 × 55mm



L-9116
Tower bar
Size:650 × 70 × 50mm



L-9114
Paper holder
Size:135 × 140 × 9mm



L-9112
Soup dish
Size:110 × 155 × 65mm



L-9116A
Double towel bar
Size:650 × 110 × 50mm



L-9115
Towel ring
Size:160 × 180 × 60mm



L-9113
Glass holder
Size:70 × 100 × 100mm



L-9117
Double towel rack
Size:650 × 205 × 50mm



L-9113A
Double glass holder
Size:155 × 105 × 100mm



L-9118
Glass shelf
Size:600 × 135 × 47mm



L-9119
Toilet brush holder
Size:120 × 165 × 380mm

FEATURES:
MATERIAL: Stainless steel 304

FINISH:Polished Stainless Steel(PSS)
Satin Stainless Steel(SSS)
Titanium Plated (TI)



LOIRE

Bathroom Accessories



L-9401
Size: 3/4/5 robe hooks



L-9402
Size: 3/4/5 robe hooks



L-9403
Size: 3/4/5 robe hooks



L-9404
Size: 3/4/5 robe hooks



L-9409



L-9410



L-9412



L-9413



L-9414



L-9415



L-9416



L-9417



L-9421

FEATURES:

MATERIAL: Brass

FINISH: Bright Chrome Plated (CP)

Satin Chrome Plated (SCP)

Titanium Plated (TI)



L-9422



L-9423

FEATURES:

MATERIAL: Stainless steel 304

FINISH: Polished Stainless Steel (PSS)

Satin Stainless Steel (SSS)

Titanium Plated (TI)