

New



Mini SIP Internet Phone H10

- ✓ Delicate, small and exquisite fully functional
- ✓ Can store 10 shortcut numbers, one key call
- ✓ Supports 2 programmable DSS keys
- ✓ Support desktop or wall mounted installation
- ✓ 2.4G/5G dual-band WiFi
- ✓ Support business code IP broadcast, factory recovery
- ✓ Easy installation and quick deployment configuration



The mini SIP phone H10 makes communication more free and efficiency higher

The Mini SIP Phone H10 - With an extremely compact body, it redefines the convenience and efficiency of business communication. Designed specifically for space-constrained scenarios, it perfectly blends into exquisite environments such as hotels and offices, unleashing outstanding performance within a small space.

Brightening characteristic

Appearance design: Exquisite design, all-round experience.

Ultra-compact body: Exquisite design, easily adapted to any narrow space, balancing aesthetics and practicality.

Dual SIP lines: Supports 2 independent lines, flexibly meeting the demands of multi-tasking calls.

Efficient operation: 10 speed dial keys + 2 programmable DSS keys, one-click access, more convenient operation. High-definition sound quality: Professional-level HD Voice technology, combined with high-quality speakers, brings a clear and transparent call experience. Flexible installation, wireless connection.


Dual-mode installation: Supports desktop placement and wall mounting, adapting different scenarios.

Dual-band Wi-Fi: 2.4G/5G dual-band wireless module, supporting batch deployment, stable connection, and saying goodbye to wiring constraints.

Dual-mode power supply: Supports IEEE 802.3af PoE power supply and DC power adapter power supply, providing more flexible deployment and meeting the requirements of different environments.

Suitable for all scenarios

Whether it's a hotel room, a school office, a hospital nurse station, a supermarket cashier counter, or a home office, H10 can be your reliable communication partner with its outstanding voice quality and flexible deployment methods. See the big picture through the small details, enjoy intelligence and efficiency.

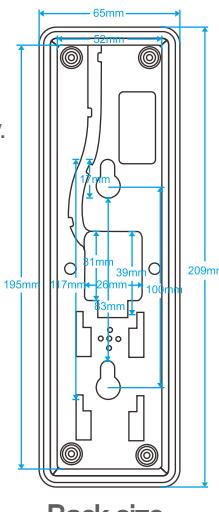

Back size



Basic Function

- 2*SIP line
- Hd audio
- Quick DSS keys
- Handle/Hands-free mode
- Desktop/Wall-mounted installation
- Power adapter
- Sever code (IP address broadcast, restore the factory)

Phone Function

- Inbound/outbound
- Mute
- Call Hold
- Call waiting
- Speed dial
- Anonymous call
- Redial
- Auto-answer
- Voice mail (with server)
- Three-party meeting (invited to join)
- Hotline
- Do not disturb
- IP direct dial

Audio Characteristics

- High fidelity sound: HD handle, HD hands-free
- Broadband codec: G.722
- Narrowband codec: G.711(A/μ), G.723.1, G.729AB, G.726
- DTMF: In-band transmission ,
- Out-of-band transmission(RFC 2833),
- SIP INFO
- RFC2833+SIP INFO
- Full duplex hands-free

- Acoustic Echo Cancellation (AEC)
- Voice Activity Detection (VAD)
- Comfort noise generation (CNG)
- Packet loss compensation(PLC)
- Background noise detection (BNE)
- Automatic gain control (AGC)
- Dynamic adaptive RTP jitter buffer up to 300ms

Network Characteristics

- 2.4G/5G dual-band WiFi
- Supports IPv4/IPv6/IPv4&IPv6
- IP address allocation mode: Static IP/DHCP
- Virtual Local Area Network: VLAN
- Data link layer protocol: CDP/LLDP
- Support redundant servers
- Support ICE and STUN (NAT Session Traversal)
- Support UDP/TCP/TLS transmission modes
- Support the SRTP encryption protocol
- SIP Trust Server (Anti-Attack Mechanism)
- HTTP/HTTPS
- TR-069 Network Management Protocol
- SNTP automatically synchronizes network dates and times
- QoS: QoS: 802.1p/Q tagging (VLAN), Layer3/ToS/DSCP
- HTTPS Certificate Management
- Support configuration file encryption and information verification mechanism
- RTCP-XR, VQ-RTCPXR
- OpenVPN, IEEE802.1X

Configuration & Management

- Web page configuration
- Automatic deployment: Supports FTP/TFTP/HTTP/HTTPS/DHCP Option 66/SIP PnP
- Gateway deployment: TR-069 network management
- Configure export/import
- Network packet capture and diagnosis
- Custom/Fully restore factory Settings
- System firmware upgrade
- System operation log

Physical Specifications

- Information indicator: LED red light
- Phone keyboard:
 - 2 DSS keys
 - 12 standard telephone number keys
 - Three function keys: VOL- key, MUTE key and VOL+ key
- Colour: Athens Black
- R11 handle curve x1
- Installation method: Desktop/Wall-mounted
- Hd handle (RJ11) x1
- RJ45 interface x1: Network x1
- DC interface: DC5V/2A
- Working humidity: 10~95%
- Working temperature: 0°C~45°C
- Product size: 65*209*47.5mm (No bracket)
- Product weight: 0.4kg
- Inner box size: 250*140*60mm