



Model NO: BBT-2425FG08V

Type : Fiberglass Omni Antenna

Application:

- ★2.4G antenna access transmission system
- ★WLAN、WIFI wireless system
- ★point-to-multipoint coverage transmission system

Features:


- ★High gain, low VSWR
- ★High quality fiberglass radome, strong protection
- ★Strong environmental adaptability
- ★Standard steel mounting kits





Specifications:

Electrical	
Model Number	BBT-2425FG08V
Frequency Range	2400-2500MHz
Polarization Type	Vertical
Gain	8dBi
3dB Beam-Width. H-Plan	360°
3dB Beam-Width. E-Plan	16°
VSWR	≤1.5
Input Impedance	50Ω
Max Input Power.	50W
Lightning Protection	DC Grounded
Mechanical	
Connector Type	N-Type Female
Dimensions H*W*D (mm)	Φ20*560 (mm)
Radome Material	Fiberglass
Radome color	gray
Operating Temperature Rang	-40°C/+60°C
Support Pole Diameter	φ30-φ60(mm)
Rated Wind Velocity	60m/s

VSWR:

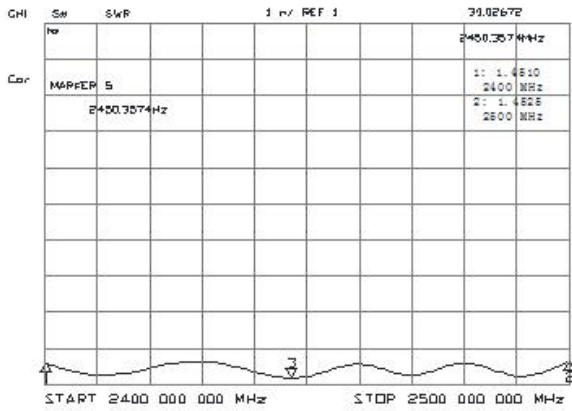

Radiation Pattern:

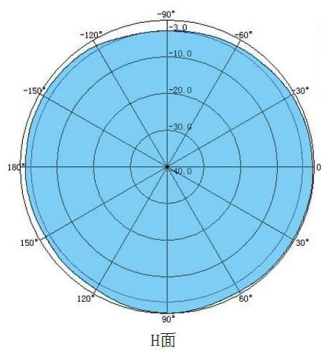

**BBT ANTENNAS INC**

Tel:(8620)38867118 Fax:(8620)38860481 <http://www.bbtantennas.com>