



BBT ANTENNAS INC

Model NO: BBT-0660WL0509R090

Type :2T2R Wall mount Antenna

Application:

★Support 4G、5G 、6G communication system

★For indoor DAS coverage system

Features:

★Broadband,Low PIM ,Low VSWR, good performance

★Attractive appearance

★Wall mounting , install and use conveniently





Specifications:

Electrical					
Model Number	BBT-0660WL0509R090				
Frequency Range	617-698 MHz	698-960 MHz	1710-2700 MHz	3300-4200 MHz	4200-6000 MHz
Polarization Type	$\pm 90^\circ$				
Gain	5dBi	6dBi	9dBi	8dBi	7dBi
3dB Beam-Width. H-Plan	90°	90°	75°	60°	50°
3dB Beam-Width. E-Plan	80°	80°	55°	40°	30°
VSWR	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Intermodulation IM3(2*43dBmcarrier)	≤ -150 dBc				
Front to Back Ratio(dB)	≥ 16 dB	≥ 16 dB	≥ 20 dB	≥ 16 dB	≥ 15 dB
Isolation	≥ 20 dB	≥ 20 dB	≥ 25 dB	≥ 25 dB	≥ 30 dB
Input Impedance	50 Ω				
Max Input Power.	50W				
Mechanical					
Connector Type	2*N-Female				
Cable	SFF-50-3				
Cable length	25cm				

Dimensions H*W*D (mm)	315*195*66(mm)
Radome Material	ABS
Radome color	White
Operating Temperature Rang	-40°C/+60°C

Radiation Pattern:

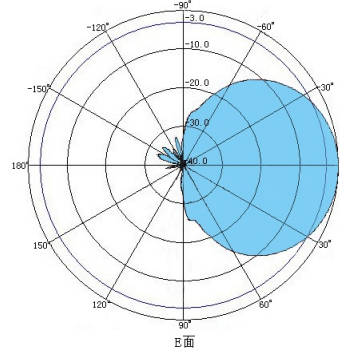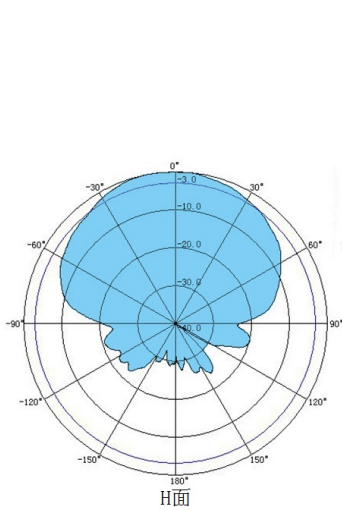

BBT ANTENNAS INC

Tel: (+86) 0757-66898899

<http://www.bbtantennas.com>