



Part NO.: BBT-Q2458M0810-N6

Type :MIMO fiberglass Antenna

Application:

- ★WLAN,WIFI wireless coverage system
- ★point to Multipoint coverage
- ★2.4G 3port & 5.8G 3port

Features:


- ★Adopt double Broadband design,
- ★High gain, omnidirectional coverage
- ★MIMO Signal channel
- ★Strong anti-interference capability
- ★DC ground protection



Specifications:



| Electrical | | |
|----------------------------|--------------------|--------------|
| Part Number | BBT-Q2458M0810-N6 | |
| Frequency Range | 2400-2500MHz | 5150-5850MHz |
| Polarization Type | Vertical | |
| Gain | 8dBi | 10dBi |
| 3dB Beam-Width. H-Plan | 360° | 360° |
| 3dB Beam-Width. E-Plan | 16° | 10.5° |
| VSWR | ≤1.5 | |
| Input Impedance | 50Ω | |
| Max Input Power. | 100W | |
| Lightning Protection | DC Grounded | |
| Mechanical | | |
| Connector Type | 6× SMA-Type Female | |
| Dimensions H*W*D (mm) | Φ160*405 (mm) | |
| Radome Material | PVC | |
| Radome color | white | |
| Operating Temperature Rang | -40°C/+60°C | |
| Support Pole Diameter | φ30-φ60(mm) | |
| Rated Wind Velocity | 60m/s | |

VSWR:


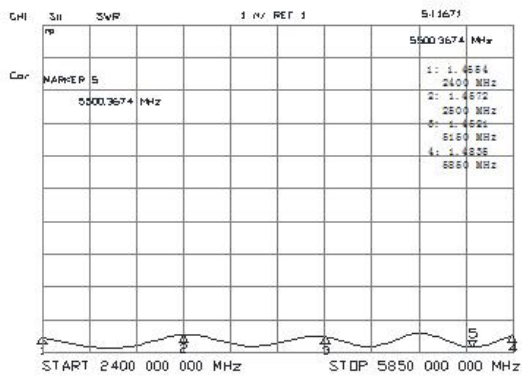


Radiation Pattern:

2400-2500MHz

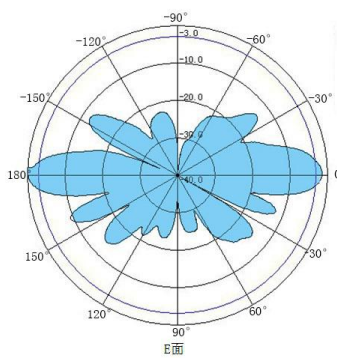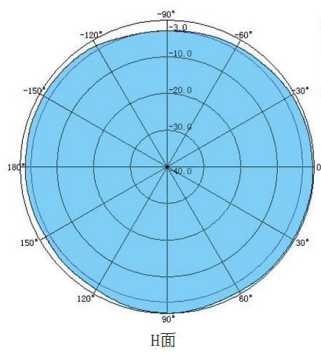

5150-5850MHz

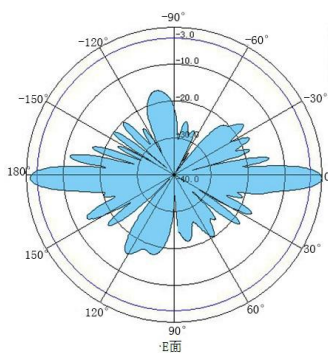

BBT ANTENNAS INC

Tel:(8620)38867118 Fax:(8620)38860481 <http://www.bbtantennas.com>