



BBT ANTENNAS INC

Model NO: BBT-0660CL0306V-206

Type : 2T2R Ceiling Antenna

Application:

- ★Support 4G、5G、6G communication system
- ★For indoor wireless coverage system (For indoor DAS)



Features:


- ★Broadband ,Low PIM,Low VSWR, stable performance
- ★Small size, Attractive appearance
- ★Regular ceiling installation, easy to install and use.

Specifications:


Electrical					
Model Number	BBT-0660CL0306V-206				
Frequency Range	617-698 MHz	698-960 MHz	1710-2700 MHz	3300-4200 MHz	4200-6000 MHz
Polarization Type	Linear H/V				
Gain	3dBi	3dBi	5dBi	5dBi	6dBi
3dB Beam-Width. H-Plan	360°				
3dB Beam-Width. E-Plan	65°	65°	50°	50°	40°
VSWR	≤2.0	≤1.5	≤1.7	≤2.0	≤2.0
Port to Port Isolation	≥15dB	≥15dB	≥20dB	≥20dB	≥20dB
Intermodulation IM3(2*43dBmcarrier)	≤-150dBc				
Input Impedance	50Ω				
Max Input Power.	50W				
Mechanical					
Connector Type	2×N-Female				
Cable	SFF-50-3				
Cable length	25cm				
Dimensions H*W*D (mm)	Φ206*55(mm)				
Radome Material	ABS				
Radome color	White				

Operating Temperature Rang

-40°C/+60°C

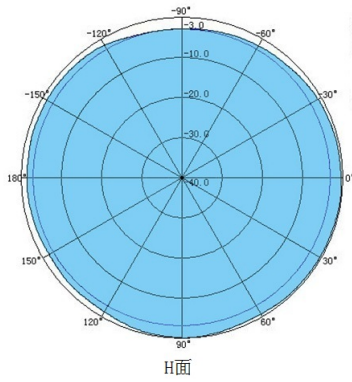

Radiation

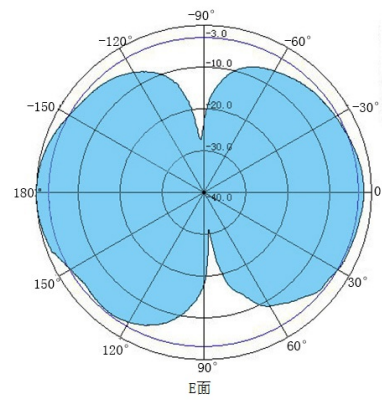

Pattern:

BBT ANTENNAS INC

Tel: (+86) 0757-66898899

<http://www.bbtantennas.com>