


All In One Heat Pump



Features:

- Full inverter, higher COP, better performance.
- R32 refrigerant, environmental friendly.
- Titanium heat exchanger, corrosion resistance .
- Intelligent controller.
- WIFI function included.
- MODBUS communication.
- Heating, cooling & Auto function included.

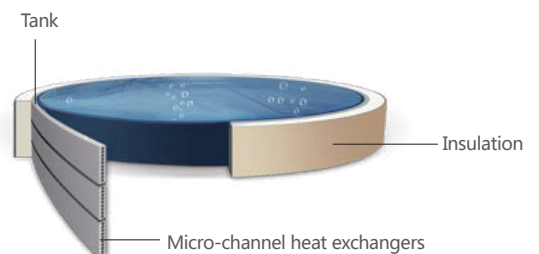

Technical specification:



Refrigerant	R134a			R290	
Model	YT-150TC1	YT-200TC1	YT-250TC1	YT-200TC2	YT-250TC2
Power Supply	220 ~ 240V/1/50Hz				
Heating Capacity at Air 20°C/15°C, Water Temperature from 15°C to 55°C					
Rated Heating Capacity (kW)	2.4	2.4	2.4	2.9	2.9
Rated Input Power (kW)	0.57	0.57	0.57	0.7	0.7
COP	4.1	4.1	4.1	4.3	4.3
Max Current (A)	15.0	15.0	15.0	16.0	16.0
Tank Capacity (L)	150	200	250	200	250
Outer Casing / Shape	Full colour painted casing / Square			Full colour painted casing / Square	
Expansion Valve	Electronic			Electronic	
Air Flow (m³/h)	450			450	
Air Discharge	Horizontal			Horizontal	
Air Duct Diameter	Non-ducted			Non-ducted	
Back-up Heater (kW)	2			2	
Default Water Temperature (°C)	55			55	
Working Temperature Range (°C)	-7-43			-7-43	
Unpacked Dimension(L*W*H)(mm)	500*500*1670	600*600*1600	600*600*1830	600*600*1600	600*600*1830
Packed Dimension(L*W*H)(mm)	640*640*1840	700*700*1770	700*700*2050	700*700*1770	700*700*2050
Net Weight (kg)	92	118	136	118	136
Gross Weight (kg)	110	137	155	137	155
Noise (dB(A))	48			48	

Application

