



BBT ANTENNAS INC

Model NO: BBT-0660WL0509V-180

Type : Wall mount Antenna

Application:

★Support 4G、5G 、6G communication system

★For indoor DAS coverage system

Features:

★Broadband,Low PIM ,Low VSWR, good performance

★Small size ,Attractive appearance

★Wall mounting , install and use conveniently





Specifications:

Electrical					
Model Number	BBT-0660WL0509V-180				
Frequency Range	617-960MH z	1350-1550 MHz	1710-2700 MHz	3300-4200 MHz	4200-6000 MHz
Polarization Type	Vertical				
Gain	5dBi	6dBi	9dBi	8dBi	7dBi
3dB Beam-Width. H-Plan	90°	80°	75°	60°	30°
3dB Beam-Width. E-Plan	80°	60°	55°	40°	25°
VSWR	≤2.0	≤2.0	≤1.7	≤2.0	≤2.0
Intermodulation IM3(2*43dBmcarrier)	≤-150dBc				
Front to Back Ratio(dB)	≥16dB	≥20dB	≥20dB	≥16dB	≥15dB
Input Impedance	50Ω				
Max Input Power.	50W				
Mechanical					
Connector Type	N-Female				
Cable	SFF-50-3				
Cable length	25cm				
Dimensions H*W*D (mm)	180*158*66(mm)				
Radome Material	ABS				

Radome color	White
Operating Temperature Rang	-40°C/+60°C

Radiation Pattern:

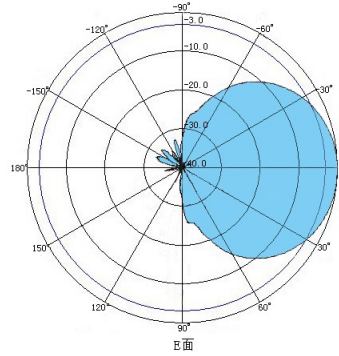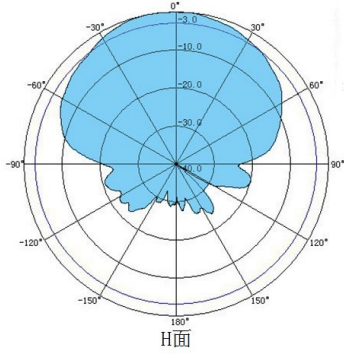

BBT ANTENNAS INC

Tel: (+86) 0757-66898899

<http://www.bbtantennas.com>