



# BBT ANTENNAS INC

Model NO: BBT-0638WL0609D090

Type :2T2R Wall mount Antenna

### Application:

- ★Support 4G、5G communication system
- ★For indoor DAS coverage system

### Features:

- ★Broadband,Low PIM ,Low VSWR, good performance
- ★Attractive appearance
- ★Wall mounting , install and use conveniently





### Specifications:

Electrical			
Model Number	BBT-0638WL0609D090		
Frequency Range	698-960MHz	1710-2700MHz	3300-3800MHz
Polarization Type	$\pm 45^\circ$		
Gain	6dBi	9dBi	8dBi
3dB Beam-Width. H-Plan	90°	65°	60°
3dB Beam-Width. E-Plan	80°	60°	40°
VSWR	$\leq 1.8$	$\leq 1.5$	$\leq 1.7$
Intermodulation IM3(2*43dBmcarrier)	$\leq -150$ dBc		
Front to Back Ratio(dB)	$\geq 16$ dB	$\geq 20$ dB	$\geq 16$ dB
Isolation	$\geq 20$ dB	$\geq 25$ dB	$\geq 25$ dB
Input Impedance	50 $\Omega$		
Max Input Power.	50W		
Mechanical			
Connector Type	2×N- Female		
Cable	SFF-50-3		
Cable length	25cm		
Dimensions H*W*D (mm)	315*195*66(mm)		
Radome Material	ABS		

Radome color	White
Operating Temperature Rang	-40°C/+60°C

Radiation Pattern:

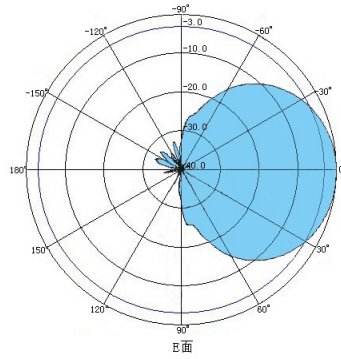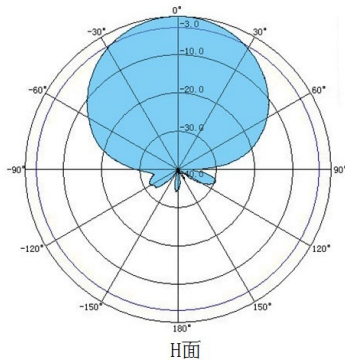

**BBT ANTENNAS INC**

Tel: (+86) 0757-66898899 <http://www.bbtantennas.com>