



BBT ANTENNAS INC

Model NO: BBT-0642WL0609R060

Type :2T2R Wall mount Antenna

Application:

- ★Support 4G、5G communication system
- ★For indoor DAS coverage system

Features:

- ★Broadband,Low PIM ,Low VSWR, good performance
- ★Attractive appearance
- ★Wall mounting , install and use conveniently





Specifications:

Electrical				
Model Number	BBT-0642WL0609R060			
Frequency Range	617-824MHz	824-960MHz	1710-2700MHz	3300-4200MHz
Polarization Type	$\pm 90^\circ$			
Gain	6dBi	6dBi	9dBi	8dBi
3dB Beam-Width. H-Plan	90°	90°	75°	60°
3dB Beam-Width. E-Plan	80°	80°	55°	40°
VSWR	≤ 2.0	≤ 1.8	≤ 1.8	≤ 1.8
Intermodulation IM3(2*43dBmcarrier)	≤ -150 dBc			
Front to Back Ratio(dB)	≥ 16 dB	≥ 16 dB	≥ 20 dB	≥ 16 dB
Isolation	≥ 20 dB	≥ 20 dB	≥ 25 dB	≥ 25 dB
Input Impedance	50 Ω			
Max Input Power.	50W			
Mechanical				
Connector Type	2 \times N- Female			
Cable	SFF-50-3			
Cable length	25cm			
Dimensions H*W*D (mm)	315*195*66(mm)			
Net weight	0.85kg			

Radome Material	ABS
Radome color	White
Operating Temperature Rang	-40°C/+60°C

Radiation Pattern:

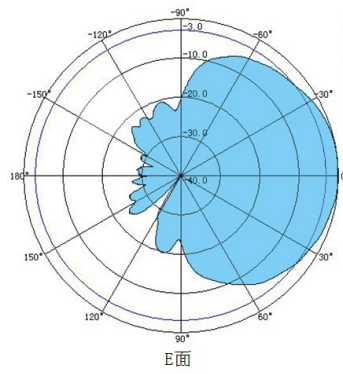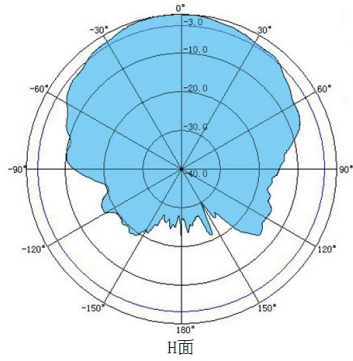

BBT ANTENNAS INC

Tel: (+86) 0757-66898899

<http://www.bbtantennas.com>