



BBT ANTENNAS INC

Model NO: BBT-0642CL0305H-206

Type : 2T2R Ceiling Antenna

Application:

- ★Support 4G、5G、6G communication system
- ★For indoor wireless coverage system (For indoor DAS)





Features:

- ★Broadband ,Low PIM,Low VSWR, stable performance
- ★Small size, Attractive appearance
- ★Regular ceiling installation, easy to install and use.

Specifications:

Electrical				
Model Number	BBT-0642CL0305H-206			
Frequency Range	617-698MHZ	698-960MHZ	1710-2700MHZ	3300-4200MHZ
Polarization Type	Linear H/V			
Gain	3dBi	5dBi	5dBi	5dBi
3dB Beam-Width. H-Plan	360°	360°	360°	360°
3dB Beam-Width. E-Plan	80°	70°	70°	40°
VSWR	≤2.0	≤1.5	≤1.5	≤1.5
Intermodulation IM3(2*43dBmcarrier)	≤-150dBc			
Input Impedance	50Ω			
Max Input Power.	50W			
Mechanical				
Connector Type	2×4.3-10 Female			
Cable	SFF-50-3			
Cable length	25cm			
Dimensions H*W*D (mm)	Φ206*55(mm)			
Radome Material	ABS			
Radome color	White			
Operating Temperature Rang	-40°C/+60°C			

Radiation Pattern:

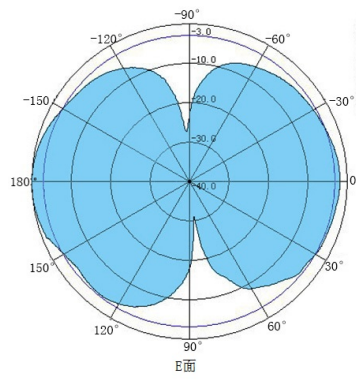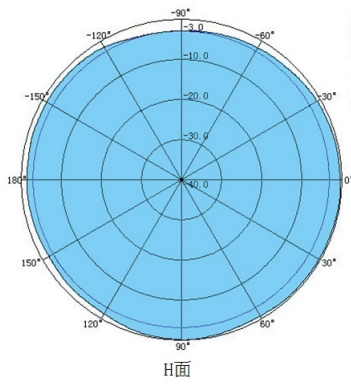

BBT ANTENNAS INC

Tel: (+86) 0757-66898899 <http://www.bbtantennas.com>